




8D™ POLYESTER DOUBLE JACKETED ATTACK HOSE

Snap-tite's 8D™ is a premium quality, industrial grade, double jacketed hose with a lightweight EPDM (Ethylene Propylene Diene Monomer) rubber liner and a maximum operating pressure of 400 psi (2758 kPa). The outside jacket utilizes a tight weave that is less likely to "catch" while dragging through the work site and helps to reduce kinking at low pressures, keeping the flow constant. The EPDM liner is inert to most chemicals, is inherently ozone resistant, and won't degrade or crack. 8D™ also has a wide temperature range; capable of being used both at a mine in Alaska or a construction site in Arizona.

FEATURES

- Double jacketed EPDM rubber lined hose made from 100% high tensile strength polyester yarn.
- Optional Dura-Cote™ treatment greatly increases abrasion, heat, flame and petrochemical resistance while virtually eliminating water pick-up. When treated, 8D™ is protected from mildew and no drying is required.
- Hose remains flexible to temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals or petroleum products.
- Excellent for tough applications such as construction sites, mines and industrial firefighting.
- Available with aluminum or brass couplings.
- Made in USA to ISO-9001:2015 certified quality assurance system.

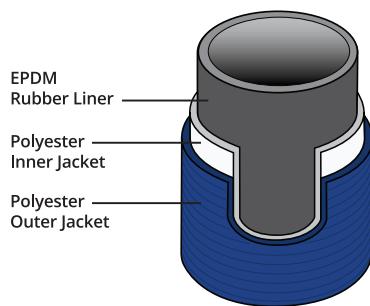


HOSE COLORS



8D™

POLYESTER DOUBLE JACKET ATTACK HOSE

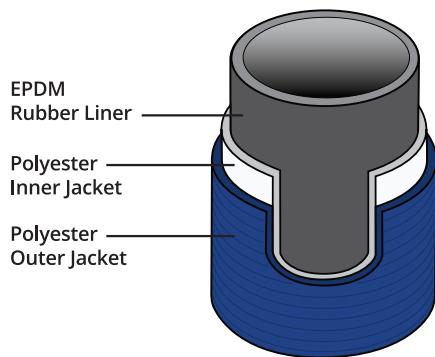

HOSE COLORS



TECHNICAL DATA & INFORMATION

Model	8D™
Basic Construction	Polyester outer/inner jacket, EPDM rubber liner
Application	Attack
Colors:	Yellow, Red, Blue, Orange, Green, White (coated), White (uncoated)
Temperature Range	-40° F - 150° F

TECHNICAL DATA & INFORMATION

NOMINAL SIZE	TESTING PRESSURES (PSI)			WEIGHT (LBS/FT)	ABRASION RESISTANCE
	Working	Proof	Burst	Uncoupled	# of Taber Abrasion Cycles (H-22 wheel)
1-1/2"	400 psi	800 psi	1200 psi	0.32	55,000+
1-3/4"	400 psi	800 psi	1200 psi	0.34	55,000+
2-1/2"	400 psi	800 psi	1200 psi	0.56	55,000+
3"	400 psi	800 psi	1200 psi	0.66	55,000+

*1-year warranty.

*1-3/4" and 2-1/2 are ULC Certified.

*Potable water approved: No

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045