




# 8T™

## LIGHTWEIGHT POLYESTER DOUBLE JACKETED HOSE

Snap-tite's 8T™ is a premium quality, industrial grade, double jacketed hose with a lightweight polyurethane liner and a maximum operating pressure of 400 psi (2758 kPa). The outside jacket utilizes a tight weave that is less likely to "catch" while dragging through the work site and helps to reduce kinking at low pressures, keeping the flow constant. The polyurethane liner material meets NSF Standard 61 for potable water use and can be used as a hydrant or water main bypass in an emergency.

### FEATURES

- Double jacketed, polyurethane-lined hose made from 100% high tensile strength polyester yarn.
- Optional Dura-Cote™ treatment greatly increases abrasion, heat, flame and petrochemical resistance while virtually eliminating water pick-up. When treated, 8T™ is protected from mildew and no drying is required.
- Hose remains flexible to temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation and most chemicals or petroleum products.
- Excellent for tough applications such as construction sites, mines and industrial firefighting.
- Available with aluminum or brass couplings.
- Made in USA to ISO-9001:2015 certified quality assurance system.




### HOSE COLORS



# 8T™

## LIGHTWEIGHT POLYESTER DOUBLE JACKET HOSE

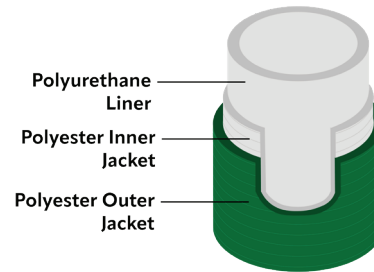

### HOSE COLORS



TECHNICAL DATA & INFORMATION	
Model	8T™
Basic Construction	Polyester outer/inner jacket, polyurethane liner.
Application	Attack, Potable Water
Colors:	Yellow, Red, Blue, Orange, Green, White (coated), White (uncoated)
Temperature Range	-40° F - 150° F

TECHNICAL DATA & INFORMATION					
NOMINAL SIZE	TESTING PRESSURES (PSI)			WEIGHT (LBS/FT)	ABRASION RESISTANCE
	Working	Proof	Burst	Uncoupled	# of Taber Abrasion Cycles (H-22 wheel)
1-1/2"	400 psi	800 psi	1200 psi	0.28	55,000+
1-3/4"	400 psi	800 psi	1200 psi	0.28	55,000+
2-1/2"	400 psi	800 psi	1200 psi	0.46	55,000+
3"	400 psi	800 psi	1200 psi	0.66	55,000+

\*1-year warranty.

\*Potable water approved: Yes

\*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045