



SNAP-TITE ATX™

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

Manufactured in a similar process as TPX™, ATX™ utilizes a 3-ply design where the cover and liner are extruded independently and double vulcanized to guarantee a consistent, compact hose wall. The polyester reinforcement can then be woven tighter, making this hose more resistant to puncture while also being easier to pack and store. ATX™ has a stronger jacket which increases the service test pressure of the LDH sizes to 300 psi (2068 kpa).

FEATURES

- 3-ply rubber municipal fire hose with both the cover and liner made of heavy duty nitrile rubber, high tensile strength tightly woven polyester reinforcement for maximum durability and flexibility.
- Smooth liner keeps friction loss to a minimum for greater flow.
- Nitrile rubber cover greatly increases abrasion resistance, provides long service life, and the tightly woven reinforced jacket resists punctures.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Engineered to meet the requirements of high pressure applications. Designed for relay pumping, pressurizing standpipes, and sprinkler systems.
- Manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.




HOSE COLORS



Snaptitehose.com | 814.438.7616

SNAP-TITE ATX™

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

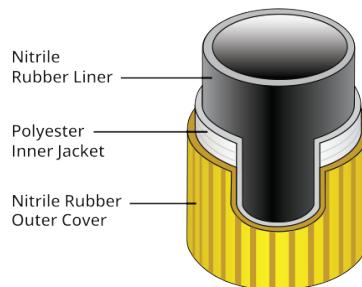

HOSE COLORS



TECHNICAL DATA & INFORMATION

Model	ATX™
Basic Construction	Heavy gauge 3-ply Nitrile rubber cover/liner with polyester inner jacket.
Application	Attack, Supply
Colors*:	Yellow, Red, Black
Temperature Range	-40° F - 200° F
Testing Pressures:	
Service	300 psi
Proof	600 psi
Burst	900 psi

SNAP-TITE ATX™

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

TECHNICAL DATA & INFORMATION										
NOMINAL SIZE	INTERNAL/OUTSIDE DIAMETER				WEIGHT					
	Dry ID	Charged ID at 50 psi	Charged ID at 150 psi	Charged OD at 150 psi	Water Pickup Weight*	Dry (lbs./50' coupled)	Charged at 50 psi (lbs./50' coupled)	# of Gallons/50'	Charged at 150 psi (lbs./50' coupled)	# of Gallons/50'
4"	4.12"	Not applicable per NFPA			0 LBS	68 LBS	Not applicable per NFPA			
5"	5.11"	Not applicable per NFPA			0 LBS	89 LBS	Not applicable per NFPA			

TECHNICAL DATA & INFORMATION					
NOMINAL SIZE	DOORWAY KINK	ABRASION RESISTANCE	PACKABILITY		
		# of Taber Abrasion Cycles (H-22 wheel)	Flat Width	Edge Thickness	180° Bend Thickness
4"	Not applicable per NFPA	35,000	6.50"	.80"	1.80"
5"	Not applicable per NFPA	33,667	8.25"	.85"	2.10"

*10-year warranty, 2-year all hazard warranty for municipal hose only.

*MIL Std 24606 used for water pickup weight.

*Potable water approved: No

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045