




# SNAP-TITE ATX™

## HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

Manufactured in a similar process as TPX™, ATX™ utilizes a 3-ply design where the cover and liner are extruded independently and double vulcanized to guarantee a consistent, compact hose wall. The polyester reinforcement can then be woven tighter, making this hose more resistant to puncture while also being easier to pack and store. ATX™ has a stronger jacket which increases the service test pressure of the LDH sizes to 300 psi (2068 kpa).

### FEATURES

- 3-ply rubber hose with both the cover and liner made of heavy-duty nitrile rubber and high tensile strength polyester for maximum durability and flexibility.
- Smooth liner keeps friction loss to a minimum for greater flow.
- Nitrile rubber cover greatly increases abrasion resistance, provides long service life, and the tightly woven reinforced jacket resists punctures.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Engineered to meet the requirements of high pressure applications. Designed for relay pumping, pressurizing standpipes, and sprinkler systems.
- Made in USA to ISO-9001:2015 certified quality assurance system.



### HOSE COLORS



ATTACK



SUPPLY




USA MADE



# SNAP-TITE ATX™

## HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

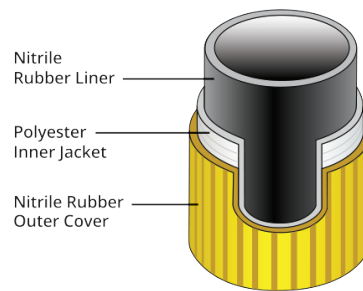

### HOSE COLORS



### TECHNICAL DATA & INFORMATION

Model	ATX™
Basic Construction	Heavy gauge 3-ply nitrile rubber cover/liner with polyester inner jacket.
Application	Attack, Supply
Colors:	Yellow, Red, Black
Temperature Range	-40° F - 200° F

### TECHNICAL DATA & INFORMATION

NOMINAL SIZE	TESTING PRESSURES (PSI)			WEIGHT (LBS/FT)	ABRASION RESISTANCE
	Working	Proof	Burst	Uncoupled	# of Taber Abrasion Cycles (H-22 wheel)
4"	300 psi	600 psi	900 psi	1.16	35,000
5"	300 psi	600 psi	900 psi	1.58	33,667
6"	300 psi	600 psi	900 psi	1.76	28,833

\*1-year warranty.

\*Potable water approved: No

\*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045