



Snap-tite
HOSE™


AGFLO™

**EXTRUDED THRU-THE-WEAVE
POLYURETHANE HOSE**

Purpose-built to move sludge quickly and efficiently, Snap-tite Hose's AgFlo™ is the industry's gold standard drag hose that tackles even the most demanding work conditions with ease. The heavy-duty hose features 100% high tenacity yarn with extruded thru-the-weave polyurethane for extreme durability that also resist snaking for excellent flow and superior productivity. AgFlo™ has the highest burst pressure rating shored up with the thickest outer cover in the industry, high-tensile hose wall, for the confidence and reliability you need to get the job done.

FEATURES

- AgFlo™ shows no visible signs of cracking of the liner or cover when subjected to testing in accordance with ATSM D1149-64, 100 PPHM/122°F/70 hours.
- Hose withstands exposure to most hydro-carbons, gasolines, oils, alkalis, and grease.
- Hose remains flexible at temperatures as low as -60°F (-51°C) and as high as 180°F.
- Designed for maximum service life and low operating cost for greater value.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

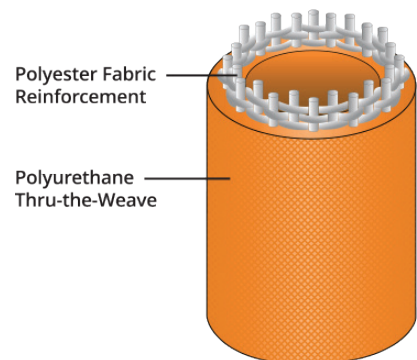

HOSE COLORS



Snap-tite
HOSE™

Snap-titehose.com | 814.438.7616

AGFLO™

EXTRUDED THRU-THE-WEAVE POLYURETHANE HOSE



HOSE COLORS



TECHNICAL DATA & INFORMATION	
Model	AgFlo™
Basic Construction	Polyurethane thru-the-weave extrusion
Application	Agriculture
Colors:	Orange, White
Temperature Range	-60° F - 180° F

TECHNICAL DATA & INFORMATION							
NOMINAL SIZE	WALL THICKNESS	TESTING PRESSURES (PSI)			WEIGHT (LBS/FT)	ABRASION RESISTANCE # of Taber Abrasion Cycles (H-22 wheel)	TENSILE STRENGTH (LBS)
		Service	Proof	Burst			
5"	0.200"	200 psi	400 psi	500 psi	1.42	750,000+	36,500
5-1/2"	0.200"	200 psi	400 psi	500 psi	1.5	750,000+	46,000
6"	0.220"	300 psi	600 psi	900 psi	1.9	750,000+	53,750

*1-year warranty.

*Potable water approved: Yes

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045