




CONQUEST™ LDH

POLYESTER DOUBLE JACKETED SUPPLY HOSE

Looking for a hose to flow a tremendous amount of water? You've found it with CONQUEST™! Today's fires are hotter and more water is needed at the nozzle to knock them down fast. Conquest™ meets that challenge every day. Our patented thru-the-weave extruded polyurethane liner has an incredibly smooth surface that enhances water flow.

FEATURES

- Patented double jacketed hose made from 100% high tensile strength polyester outer jacket with extruded thru-the-weave polyurethane inner hose. NO ADHESIVE IS USED. The lining will never delaminate.
- Optional Dura-Cote™ treatment.
- Outstanding flow and low friction loss.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and meets all NFPA requirements for ozone resistance.
- Suitable for CAFS and foam concentrates.
- Engineered to meet the requirements of high-pressure applications. General industrial and construction use, designed for relay pumping, pressurizing standpipes, and sprinkler systems.
- Made in USA to ISO-9001:2015 certified quality assurance system.

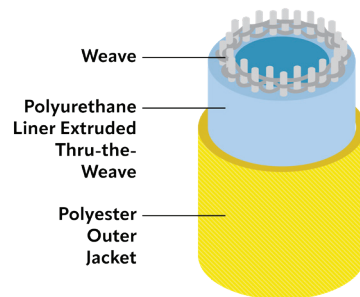


HOSE COLORS



CONQUEST™ LDH

POLYESTER DOUBLE JACKET SUPPLY HOSE

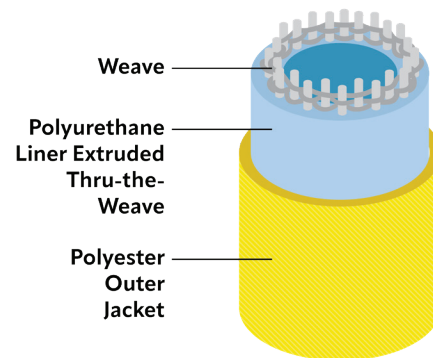

HOSE COLORS



TECHNICAL DATA & INFORMATION	
Model	Conquest™ LDH
Basic Construction	Polyester outer jacket, extruded thru-the-weave polyurethane liner.
Application	Attack, Supply, CAFS, Potable Water
Colors:	Yellow, Red, Blue, Orange, Green, White (coated), White (uncoated)
Temperature Range	-40° F - 150° F

TECHNICAL DATA & INFORMATION					
NOMINAL SIZE	TESTING PRESSURES (PSI)			WEIGHT (LBS/FT)	ABRASION RESISTANCE
	Working	Proof	Burst	Uncoupled	# of Taber Abrasion Cycles (H-22 wheel)
4"	300 psi	600 psi	900 psi	0.8	38,500+
5"	300 psi	600 psi	900 psi	1.09	38,500+
6"	300 psi	600 psi	900 psi	1.52	38,500+

*1-year warranty.

*Potable water approved: Yes

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045