



**Snaptite**  
HOSE™


# TPX™ LDH

## UNIQUE 3-PLY CONSTRUCTION

Traditionally, manufactured extruded hose can vary in thickness, becoming bulky, and heavy. TPX™ utilizes a 3-ply design where the ribbed cover and smooth nitrile liner are extruded independently. The cover is inserted inside the tight-weave reinforcement, vulcanized, and turned inside out. The liner is then inserted and the hose is vulcanized for a second time to form a bond of all three plies, guaranteeing a consistent, compact hose wall. The Snap-tite TPX™ is highly resistant to both conductive and radiant heat.

### FEATURES

- 3-ply rubber municipal fire hose with both the cover and liner made of heavy duty nitrile rubber, high tensile strength tightly woven polyester reinforcement for maximum durability and flexibility.
- Smooth liner keeps friction loss to a minimum.
- Nitrile rubber cover greatly increases abrasion resistance, provides long service life and the tightly woven reinforcement resists puncture.
- Suitable for supply and soft sleeve suction applications.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Tighter weave allows more resistance to puncture while also being easier to pack and store.
- Lays flat and needs less hose bed space than typical extruded hose.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO 9001:2015 certified quality assurance system.

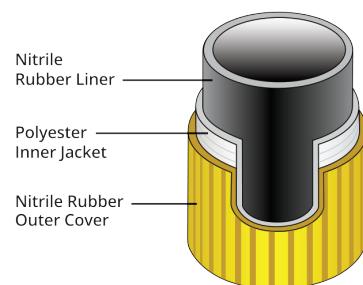

### HOSE COLORS




**Snaptite**  
HOSE™

[Snaptitehose.com](http://Snaptitehose.com) | 814.438.7616

# TPX™ LDH

## UNIQUE 3-PLY CONSTRUCTION

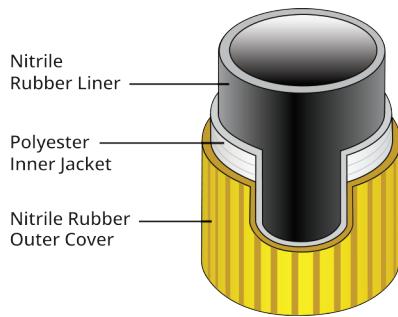

### HOSE COLORS



### TECHNICAL DATA & INFORMATION

Model	TPX™ LDH
Basic Construction	3-ply Nitrile rubber cover/liner with polyester inner jacket.
Application	Supply
Colors:	Yellow, Red, Orange
Temperature Range	-40° F - 200° F

### TESTING PRESSURES

Nominal Size	Service	Proof	Burst
3"	300 psi	600 psi	900 psi
4"	250 psi	500 psi	750 psi
5"	225 psi	450 psi	675 psi
6"	200 psi	400 psi	600 psi
8"	125 psi	250 psi	400 psi

# TPX™ LDH

## UNIQUE 3-PLY CONSTRUCTION

TECHNICAL DATA & INFORMATION										
NOMINAL SIZE	INTERNAL/OUTSIDE DIAMETER				WEIGHT					
	Dry ID	Charged ID at 50 psi	Charged ID at 150 psi	Charged OD at 150 psi	Water Pickup Weight*	Dry (lbs./50' coupled)	Charged at 50 psi (lbs./50' coupled)	# of Gallons/50'	Charged at 150 psi (lbs./50' coupled)	# of Gallons/50'
3"	3.14"	Not applicable per NFPA			0 LBS	37	Not applicable per NFPA			
4"	4.19"	Not applicable per NFPA			0 LBS	50	Not applicable per NFPA			
5"	5.09"	Not applicable per NFPA			0 LBS	66	Not applicable per NFPA			
6"	6.15"	Not applicable per NFPA			0 LBS	72	Not applicable per NFPA			
8"	8-8.8150	Not applicable per NFPA			0 LBS	Not applicable per NFPA				

TECHNICAL DATA & INFORMATION					
NOMINAL SIZE	DOORWAY KINK	ABRASION RESISTANCE	PACKABILITY		
		# of Taber Abrasion Cycles (H-22 wheel)	Flat Width	Edge Thickness	180° Bend Thickness
3"	Available upon Request	14,000	Available upon Request		
4"	Not applicable per NFPA	13,000	.60"	.70"	1.65"
5"	Not applicable per NFPA	56,520	8.20"	.75"	1.70"
6"	Not applicable per NFPA	13,500	9.75"	.85"	2.00"
8"	Available upon Request				

\*10-year warranty, 2-year all hazard warranty.

\*MIL Std 24606 used for water pickup weight.

\*4" and 5" are UL/ULC Certified

\*8" has a 1-year warranty.

\*Potable water approved: No

\*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045