




# SNAP-TITE XLF™

DURABLE & RESISTANT TO  
PUNCTURE HOSE

The XLF™ is a polyurethane thru-the-weave large diameter hose engineered for long-lasting durability and performance in the field. Originally designed to replace metal pipes used in the fracking industry for transfer of large volumes of water, it makes a great main feeder line. The XLF™ is designed for extreme resistance to abrasion and punctures with little friction loss - all while being exceptionally lightweight.

## FEATURES

- Multi-purpose large diameter hose for oil/gas, water transfer, dewatering, refineries for tank fire suppression, nuclear, agriculture, military, and water/sewer bypasses during construction.
- The XLF™ inner jacket is designed with 100% high tenacity polyester yarn and extruded thru-the-weave polyurethane - a unified, construction that ensures no delamination and provides abrasion protection.
- Hose can withstand exposure to most hydro-carbons, gasoline oils, alkalis, and grease.
- Hose shows no ozone exposure when subjected to testing in accordance with ASTM D1149-64, 100 PPHM /122 degrees F/70 hours.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

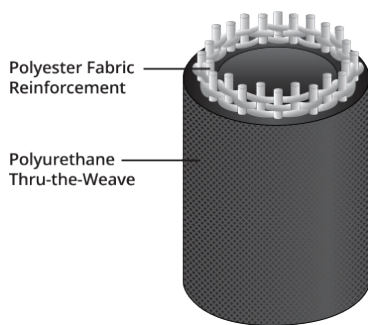

## HOSE COLORS




USA MADE



# SNAP-TITE XLF™

## DURABLE & RESISTANT TO PUNCTURE HOSE

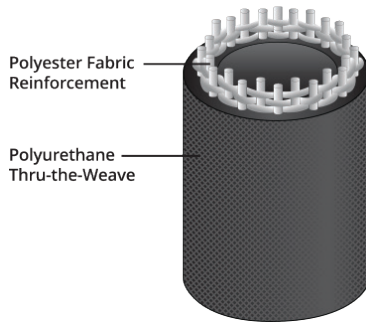

### HOSE COLORS



TECHNICAL DATA & INFORMATION	
Model	XLF™
Basic Construction	Polyurethane extruded thru-the-weave with a polyester reinforcement.
Application	Industrial, Agriculture, Military
Colors:	Black, Blue
Temperature Range	-60° F - 180° F

TECHNICAL DATA & INFORMATION					
NOMINAL SIZE	TESTING PRESSURES (PSI)			WEIGHT (LBS/FT)	ABRASION RESISTANCE
	Working	Proof	Burst	Uncoupled	# of Taber Abrasion Cycles (H-22 wheel)
1-1/2"	300 psi	600 psi	900 psi	0.24	750,000+
1-3/4"	300 psi	600 psi	900 psi	0.28	750,000+
2"	300 psi	600 psi	900 psi	0.31	750,000+
2-1/2"	300 psi	600 psi	900 psi	0.53	750,000+
3"	200 psi	400 psi	600 psi	0.62	750,000+
4"	200 psi	400 psi	500 psi	0.86	750,000+
5"	200 psi	400 psi	500 psi	1.36	750,000+
6"	200 psi	400 psi	600 psi	1.40	750,000+
7-1/4"	300 psi	600 psi	750 psi	2	750,000+
8"	225 psi	450 psi	675 psi	2.4	750,000+
10"	200 psi	400 psi	600 psi	2.7	750,000+

\*1-year warranty.

\*Potable water approved: Yes

\*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045

