




SNAP-TITE XLF™

DURABLE & RESISTANT TO
PUNCTURE HOSE

The XLF™ is a polyurethane thru-the-weave large diameter hose engineered for long-lasting durability and performance in the field. Originally designed to replace metal pipes used in the fracking industry for transfer of large volumes of water, it makes a great main feeder line. The XLF™ is designed for extreme resistance to abrasion and punctures with little friction loss - all while being exceptionally lightweight.

FEATURES

- Multi-purpose large diameter hose for oil/gas, water transfer, dewatering, refineries for tank fire suppression, nuclear, agriculture, military, and water/sewer bypasses during construction.
- The XLF™ inner jacket is designed with 100% high tenacity polyester yarn and extruded thru-the-weave polyurethane - a unified, construction that ensures no delamination and provides abrasion protection.
- Hose can withstand exposure to most hydro-carbons, gasoline oils, alkalis, and grease.
- Hose shows no ozone exposure when subjected to testing in accordance with ASTM D1149-64, 100 PPHM /122 degrees F/70 hours.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

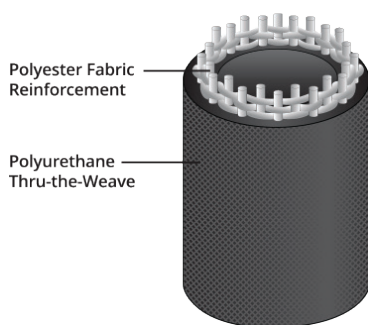

HOSE COLORS




USA MADE



SNAP-TITE XLF™

DURABLE & RESISTANT TO PUNCTURE HOSE

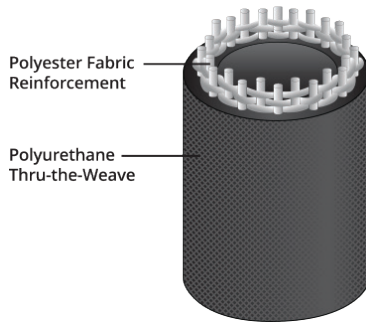

HOSE COLORS



TECHNICAL DATA & INFORMATION	
Model	XLF™
Basic Construction	Polyurethane extruded thru-the-weave with a polyester reinforcement.
Application	Agriculture, Industrial, Military
Colors:	Black, Blue
Temperature Range	-60° F - 180° F

TECHNICAL DATA & INFORMATION						
NOMINAL SIZE	WALL THICKNESS	TESTING PRESSURES (PSI)		WEIGHT (LBS/FT)	ABRASION RESISTANCE	TENSILE STRENGTH (LBS)
		Working	Burst		# of Taber Abrasion Cycles (H-22 wheel)	
7-1/4"	0.190"	300 psi	750 psi	2	750,000+	67,575
8"	0.190"	225 psi	675 psi	2.4	750,000+	74,450
10"	0.190"	200 psi	600 psi	2.7	750,000+	97,400

*1-year warranty.

*Potable water approved: Yes

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045