




Snap-Tite
HOSE™

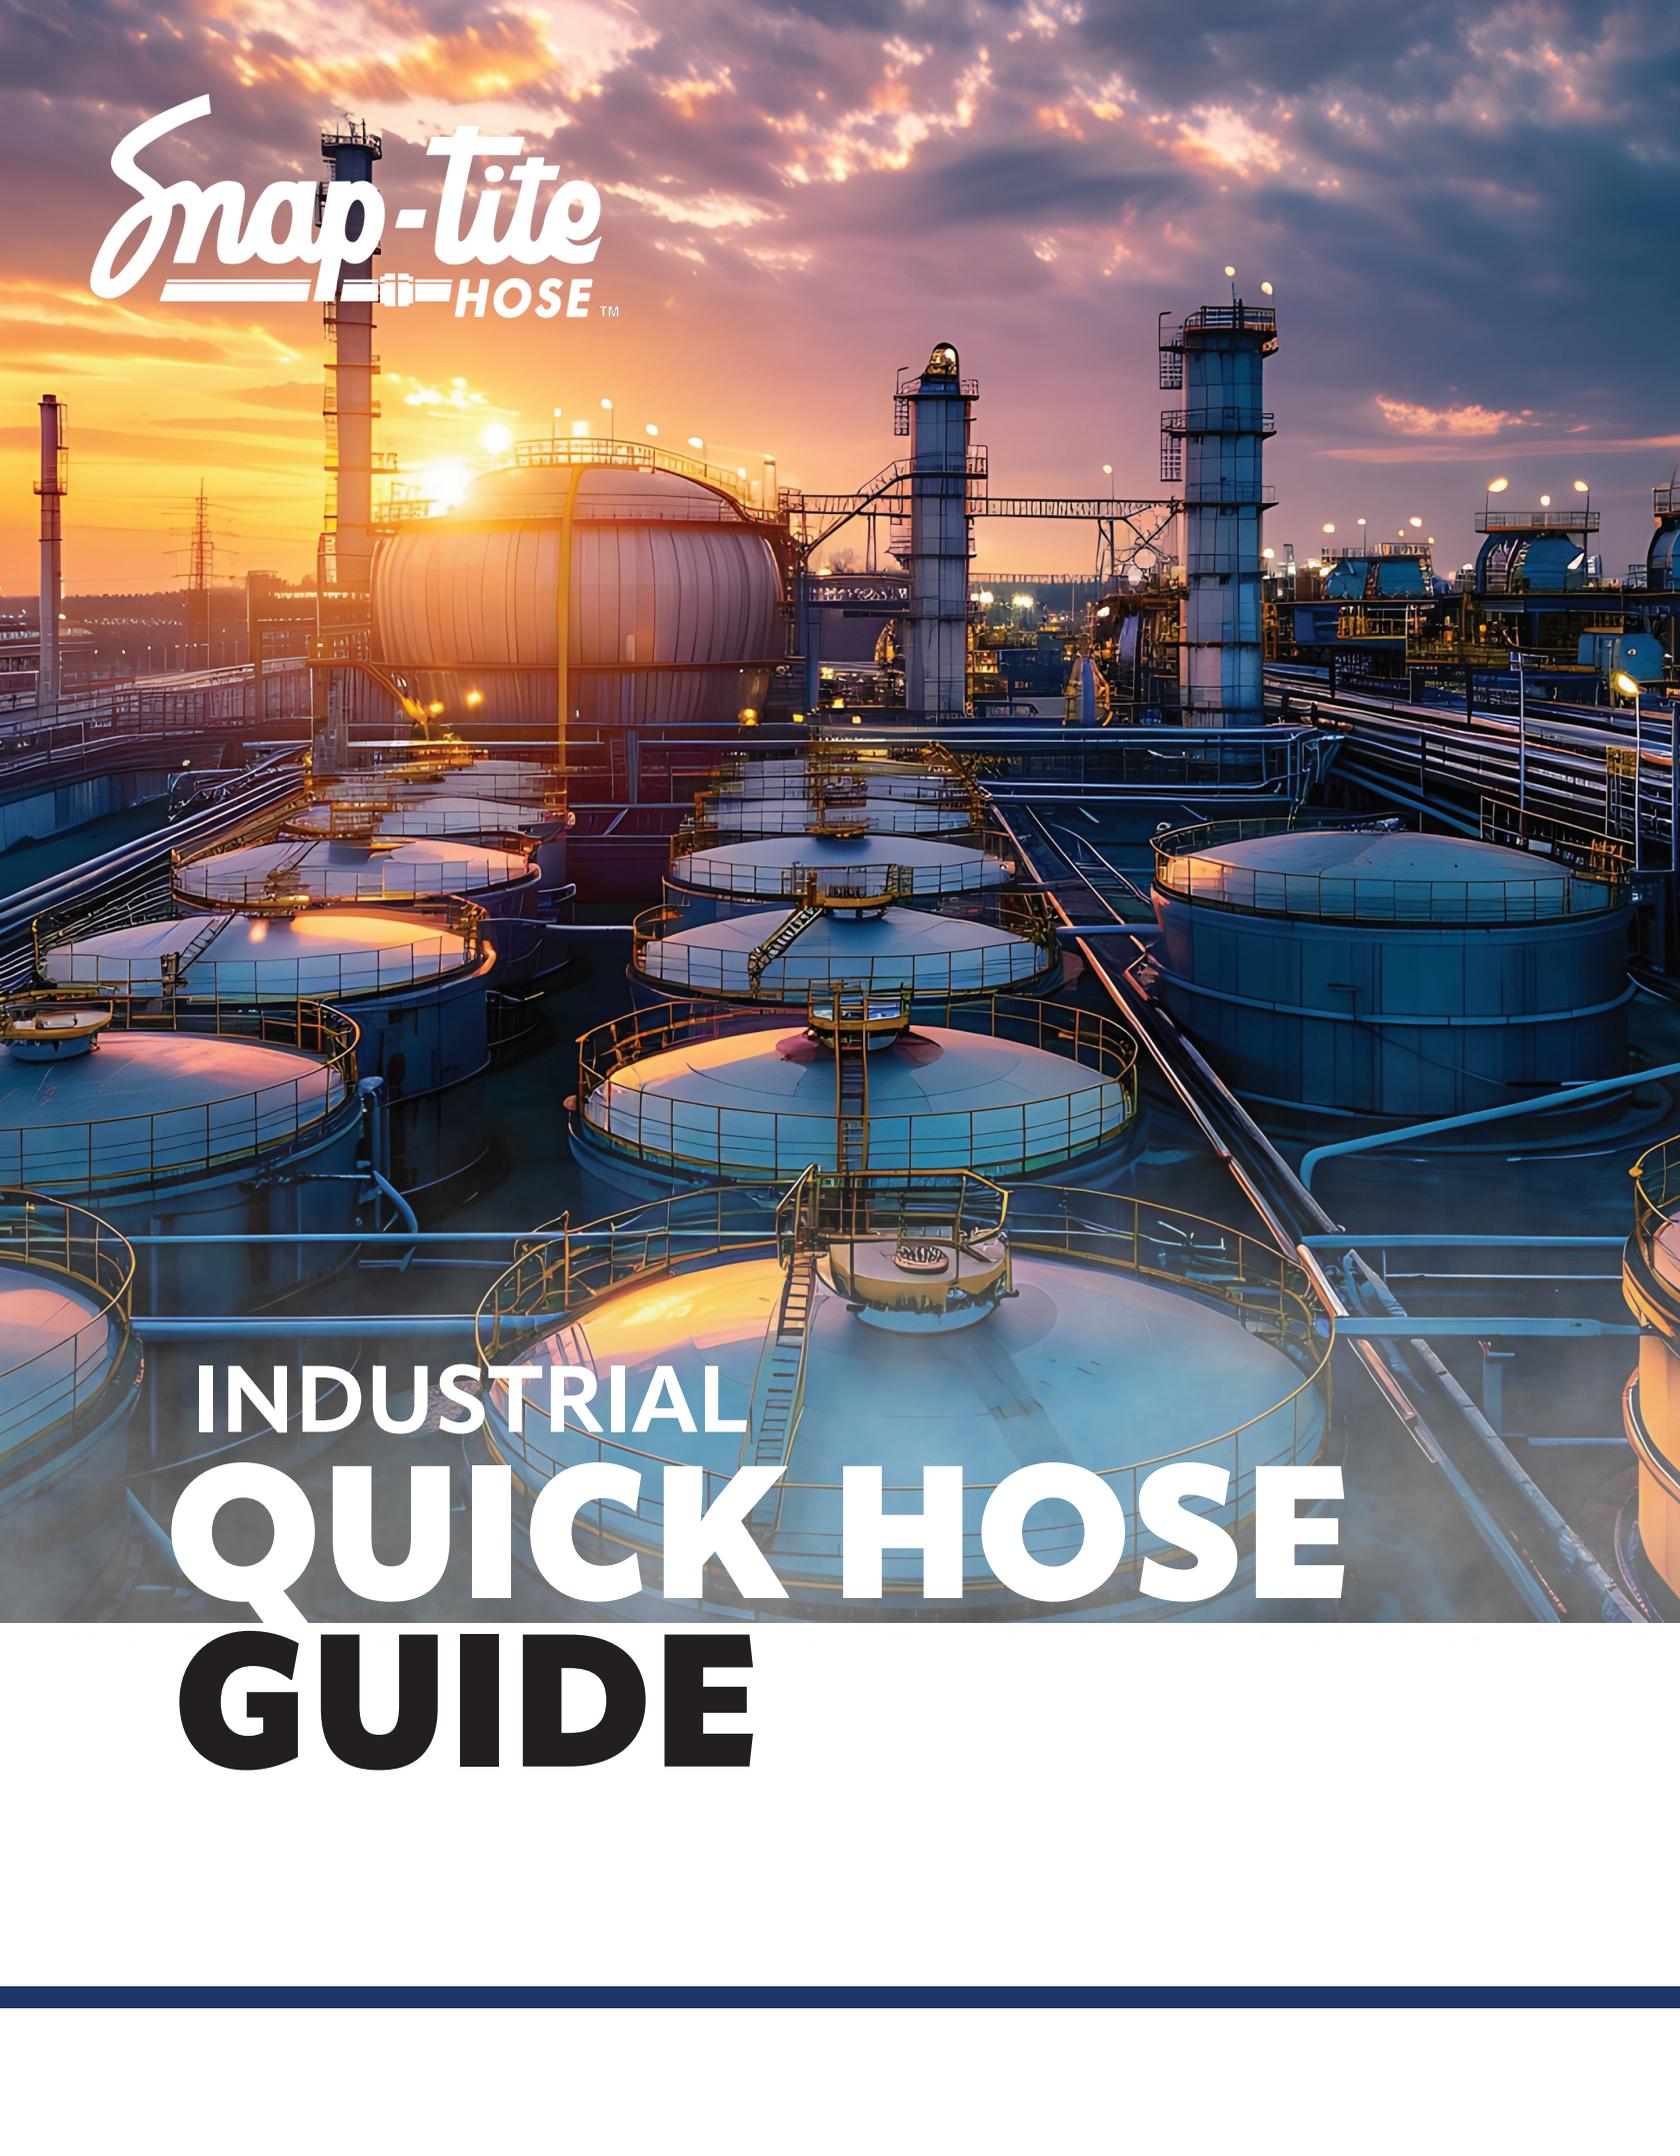

INDUSTRIAL
QUICK HOSE
GUIDE

ICON GUIDE:



AMERICAN MADE

ISO 9001: 2015 CERTIFIED QUALITY MANAGEMENT SYSTEM



1-YEAR WARRANTY



LIFETIME WARRANTY AGAINST DELAMINATION



KLEAN HOSE



ATTACK HOSE



SUPPLY LINE HOSE



SOFT SUCTION HOSE



MILITARY HOSE



OIL & GAS HOSE



AGRICULTURAL HOSE



PRODUCT OFFERINGS



CONQUEST™ LDH



- Patented double jacketed fire hose made from 100% high tensile strength polyester outer jacket with extruded thru-the-weave polyurethane inner hose.
- Outstanding flow and low friction loss.
- Suitable for CAFS and foam concentrates.
- The polyurethane lining materials meets NSF/ANSI Standard 61 for drinking water.
- Application: Attack, Supply, CAFS, Potable Water.

SIZES: 4", 5", 6"

COLORS: COATED UNCOATED



8D™



- Double jacketed EPDM rubber lined hose made from 100% high tensile strength polyester yarn.
- Recommended flow pressure: 100 psi.
- Highly resistant to ozone and oxidation.
- Application: Attack.

SIZES: 1-1/2", 1-3/4", 2-1/2", 3"

COLORS: COATED UNCOATED



5P™



- Single jacket, polyester, EPDM rubber lined hose.
- Resistent to most petrochemicals.
- Available with aluminum or brass couplings.
- Applications: Industrial.


SIZES: 1-1/2", 2", 2-1/2"

COLORS: UNCOATED

*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

SCAN ME TO LEARN MORE

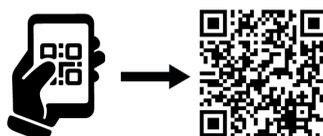

CONTACT US

- 814-438-7616
- customerservice@snaptitese.com
- snaptitese.com



PRODUCT OFFERINGS

LD™



- Extruded thru-the-weave, nitrile rubber fire hose with reinforcement via circular woven, polyester, and nylon fibers.
- Highly resistant to both conductive and radiant heat.
- Lightweight and kink resistant at low pressures makes this hose superior for high rise firefighting.
- Application: Attack.

SIZES: 1-3/4", 2-1/2"

COLORS:   



UTX™



- Woven, polyester jacket construction with an extruded thru-the-weave polyurethane cover and liner.
- UTX™ is the most compact, flexible, and lightest LDH on the market.
- Resists ozone, oxidation, and most chemical/petroleum products.
- Ergonomically designed and constructed to be up to 30 lbs (per 100 ft) lighter than conventional LDH.
- Application: Supply.

SIZES: 4", 5"

COLORS:   BLAZE  HI-VIZ 



HFX™



- Extruded thru-the-weave, nitrile rubber construction with a polyester and nylon reinforcing jacket.
- Construction creates a concentric, flexible, and maneuverable hose that is also easy to pack.
- Ribs on the cover surface greatly increase abrasion resistance and help provide a long service life.
- HFX™ Application: Attack.
- HFX™ LDH Application: Supply.

SIZES: 1", 1-1/2", 1-3/4", 2", 2-1/2", 3", 4", 5"


COLORS:  



*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

SCAN ME TO LEARN MORE

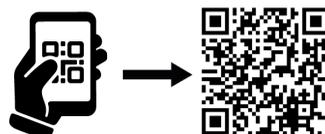

CONTACT US

-  814-438-7616
-  customerservice@snaptitehose.com
-  snaptitehose.com



PRODUCT OFFERINGS

TPX™



- 3-ply nitrile rubber cover/liner with polyester inner jacket.
- Unique 3-ply design affords incredible strength but with a lightweight profile, making it easy to manage on the fireground and virtually eliminating snaking.
- Lays flat, requiring less hose bed space than typical extruded hose.
- TPX™ Application: Supply.

SIZES: 3", 4", 5", 6", 8"

COLORS:



ATX™



- Heavy gauge 3-ply nitrile rubber cover/liner with polyester inner jacket.
- Smooth liner keeps friction loss to a minimum for greater flow.
- Engineered to meet the requirements of high pressure applications. Designed for relay pumping, pressurizing standpipes and sprinkler systems.
- Application: Attack, Supply.

SIZES: 4", 5"

COLORS:



XLF™



- The XLF™ inner jacket is designed with 100% high tenacity polyester yarn and extruded thru-the-weave polyurethane.
- Designed pressure: 200 - 300 psi.
- Multi-purpose large diameter hose for oil/gas, water transfer, dewatering refineries for tank fire suppression, nuclear, agriculture, military, and water/sewer bypass during construction.
- The polyurethane lining materials meets NSF/ANSI Standard 61 for drinking water.
- Application: Agriculture, Industrial, Military

SIZES: 1-1/2", 1-3/4", 2", 2-1/2", 3", 4", 5", 6", 7-1/4", 8", 10"


COLORS:



*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

SCAN ME TO LEARN MORE

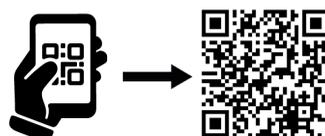

CONTACT US

- 814-438-7616
- customerservice@snaptitehose.com
- snaptitehose.com

NOTES:

