




MUNICIPAL OPERATION SOLUTIONS

MAY 2025



CORE VALUES

The Snap-tite Promise

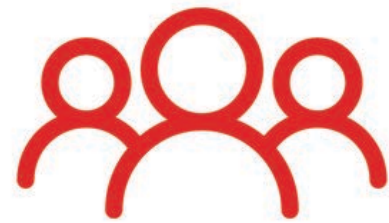


PEOPLE

We have a culture of continuous improvement. We foster a perpetual state of learning, emphasizing that it's not just a job, it's a career.



PROTECTION

Our hoses are designed to protect against a range of external factors, such as abrasion, chemicals, heat, and weather conditions.

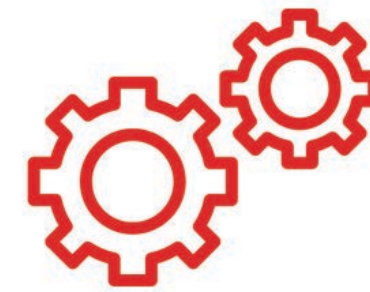

PERFORMANCE

Snap-tite hoses are engineered to deliver high performance in pressure rating, temperature resistance, flexibility, and overall durability.



INNOVATION

Our hose embodies the development and application of the most advanced, groundbreaking technology. Innovations and solutions.



Snap-tite Hose sets the industry standard for quality and safety in lay-flat hose for municipal firefighting. We manufacture a complete line of rugged, jacketed attack hoses and lightweight supply lines that deliver water from pumper to nozzle with unmatched efficiency and power.

100% U.S. Made.

100% Tested.


That's the Snap-tite Promise!






WARRIOR™

PROPRIETARY DOUBLE JACKETED HOSE

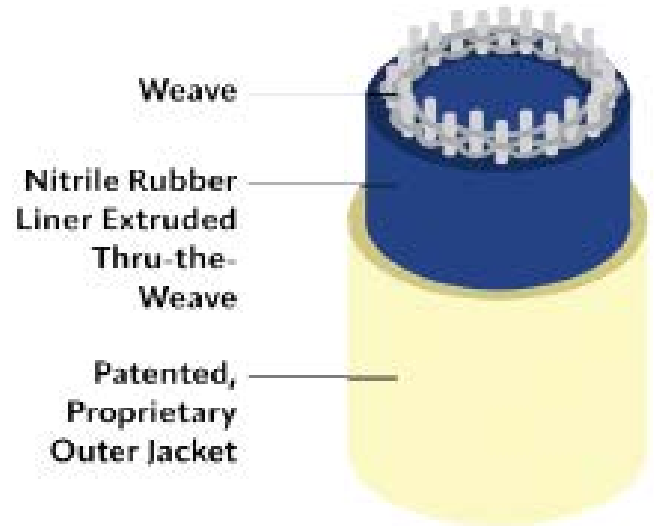

HOSE COLORS*





WARRIOR™

PROPRIETARY DOUBLE JACKETED HOSE

- The Warrior™ hose is a revolutionary attack hose built to conquer the heat of modern fires.
- Independent lab tests prove the Warrior™ can withstand extreme heat for extended periods. But it's not just about survival; the Warrior™ delivers exceptional water flow, kink resistance, and handling – even under pressure. This translates to a hose that performs exceptionally well, even in the harshest environments.
- Equipping firefighters with the Warrior™, is helping to increase firefighter and civilian survivability in fires.
- The Warrior™ sets a new standard for high-temperature attack hoses, proving itself to be in a class of its own.



WARRIOR™


FEATURES

- 60 minutes of radiant testing at 30 kw/m² of heat flux without failure.
- More than three times the abrasion resistance of any current hose on the market.
- Excellent handling, kink resistance, and flow at the nozzle at pressures of 45 psi to 100 psi.
- Optional Dura-Cote™ treatment.
- Remains flexible to temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- An attack line designed with a 1.77" and 1.88" ID waterway.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



GLADIATOR™ FG

JACKETED HOSE WITH EXTRUDED THRU-THE-WEAVE NITRILE LINER

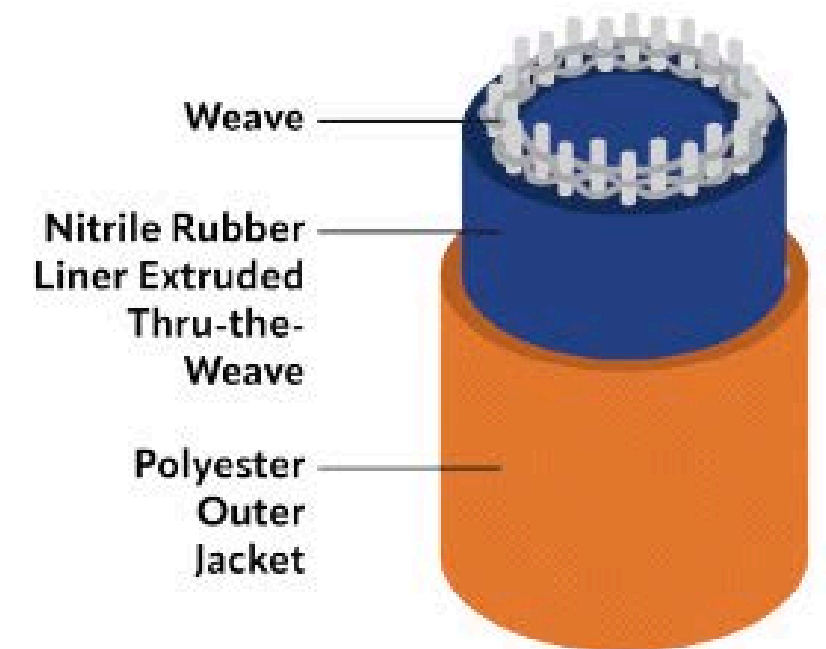

HOSE COLORS



ATTACK



USA MADE



Snap-Tite
HOSE™



GLADIATOR™ FG

JACKETED HOSE WITH EXTRUDED THRU-THE-WEAVE NITRILE LINER

- Gladiator™ is a premier hose with a polyester outside jacket that encompasses a very durable nitrile rubber thru-the-weave inside liner.
- Built to last, this rugged hose is constructed with incredible strength and long-lasting performance in mind.
- The Gladiator™ performs well at high or low pressures, has a smooth and enhanced waterway for better flows, and less kinking than other products on the market.



GLADIATOR™ FG


FEATURES

- Premium quality, outside jacket with a nitrile rubber thru-the-weave inner liner construction.
- NO ADHESIVE IS USED. The lining will never delaminate.
- Optional Dura-Cote™ treatment.
- Remains flexible at temperatures as low as -40°F (-40°C) and highly resistant to ozone and oxidation, and most chemicals and petrochemicals.
- Kink resistance exceeds that of lightweight jacketed hose.
- Suitable for use with CAFS and foam solutions.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.




GLADIATOR™ FGN

JACKETED HOSE WITH EXTRUDED THRU-THE-WEAVE NITRILE LINER

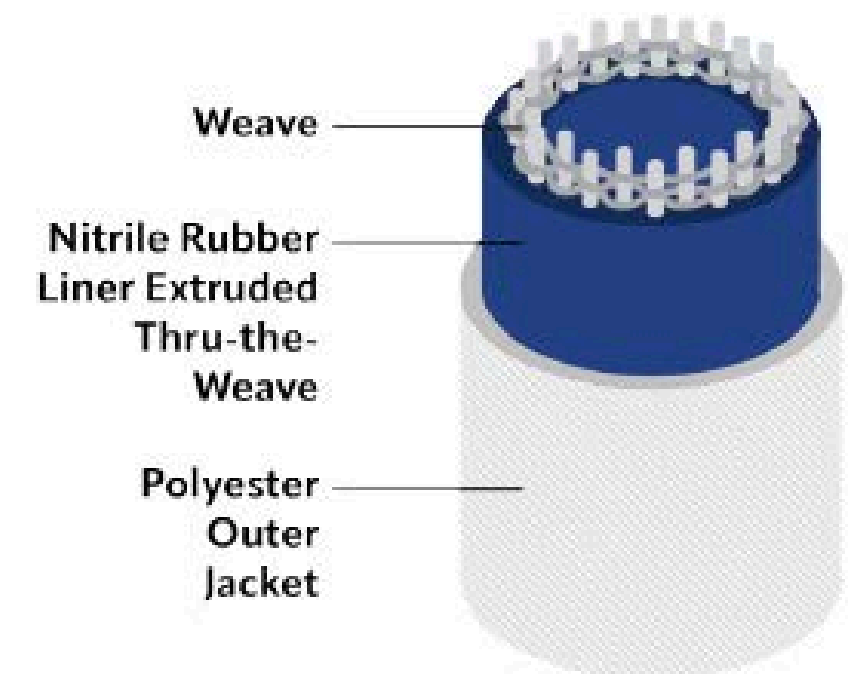

HOSE COLORS





GLADIATOR™ FGN

JACKETED HOSE WITH EXTRUDED THRU-THE-WEAVE NITRILE LINER

- Gladiator™ FGN is one of the leading attack lines in the industry. Built to last, this rugged hose is constructed with extruded thru-the-weave nitrile rubber liner with a durable outer polyester jacket.
- The Gladiator™ FGN performs well at high or low pressures and has a smooth 1.77" waterway for less kinking than other products on the market.
- Both the nitrile rubber thru-the-weave inner lining and outer jacket are proudly made at our factories in Pennsylvania, USA.



GLADIATOR™ FGN


FEATURES

- The Service Test Pressure is 500 PSI, making it a very durable and reliable hose.
- Performance rated at -40° to 200°F (-40°C to 93°C).
- Standard Dura-Cote™ protective treatment available in NFPA colors.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



CONQUEST™

POLYESTER DOUBLE JACKETED ATTACK HOSE

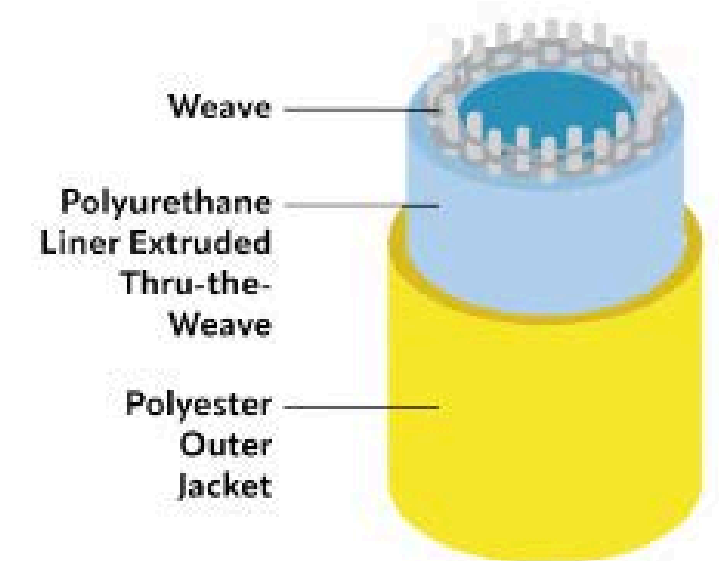

HOSE COLORS



Snap-Tite
HOSE™



CONQUEST™

POLYESTER DOUBLE JACKETED ATTACK HOSE

- Looking for a hose to flow a tremendous amount of water? You've found it with CONQUEST™!
- Today's fires are hotter and more water is needed at the nozzle to knock them down fast. Conquest™ meets that challenge.
- Its patented thru-the-weave extruded polyurethane liner has an incredibly smooth surface that enhances water flow.



CONQUEST™


FEATURES

- Patented double jacketed fire hose made from 100% high tensile strength polyester outer jacket with extruded thru-the-weave polyurethane inner hose.
- NO ADHESIVE IS USED. The lining will never delaminate.
- Optional Dura-Cote™ treatment.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and meets all NFPA requirements for ozone resistance.
- Outstanding flow and low friction loss and suitable for CAFS and foam concentrates.
- Optional color-coded stripe of one contrasting color can be woven into the outer jacket for identification purposes.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



CONQUEST™ LDH

POLYESTER DOUBLE JACKETED ATTACK HOSE

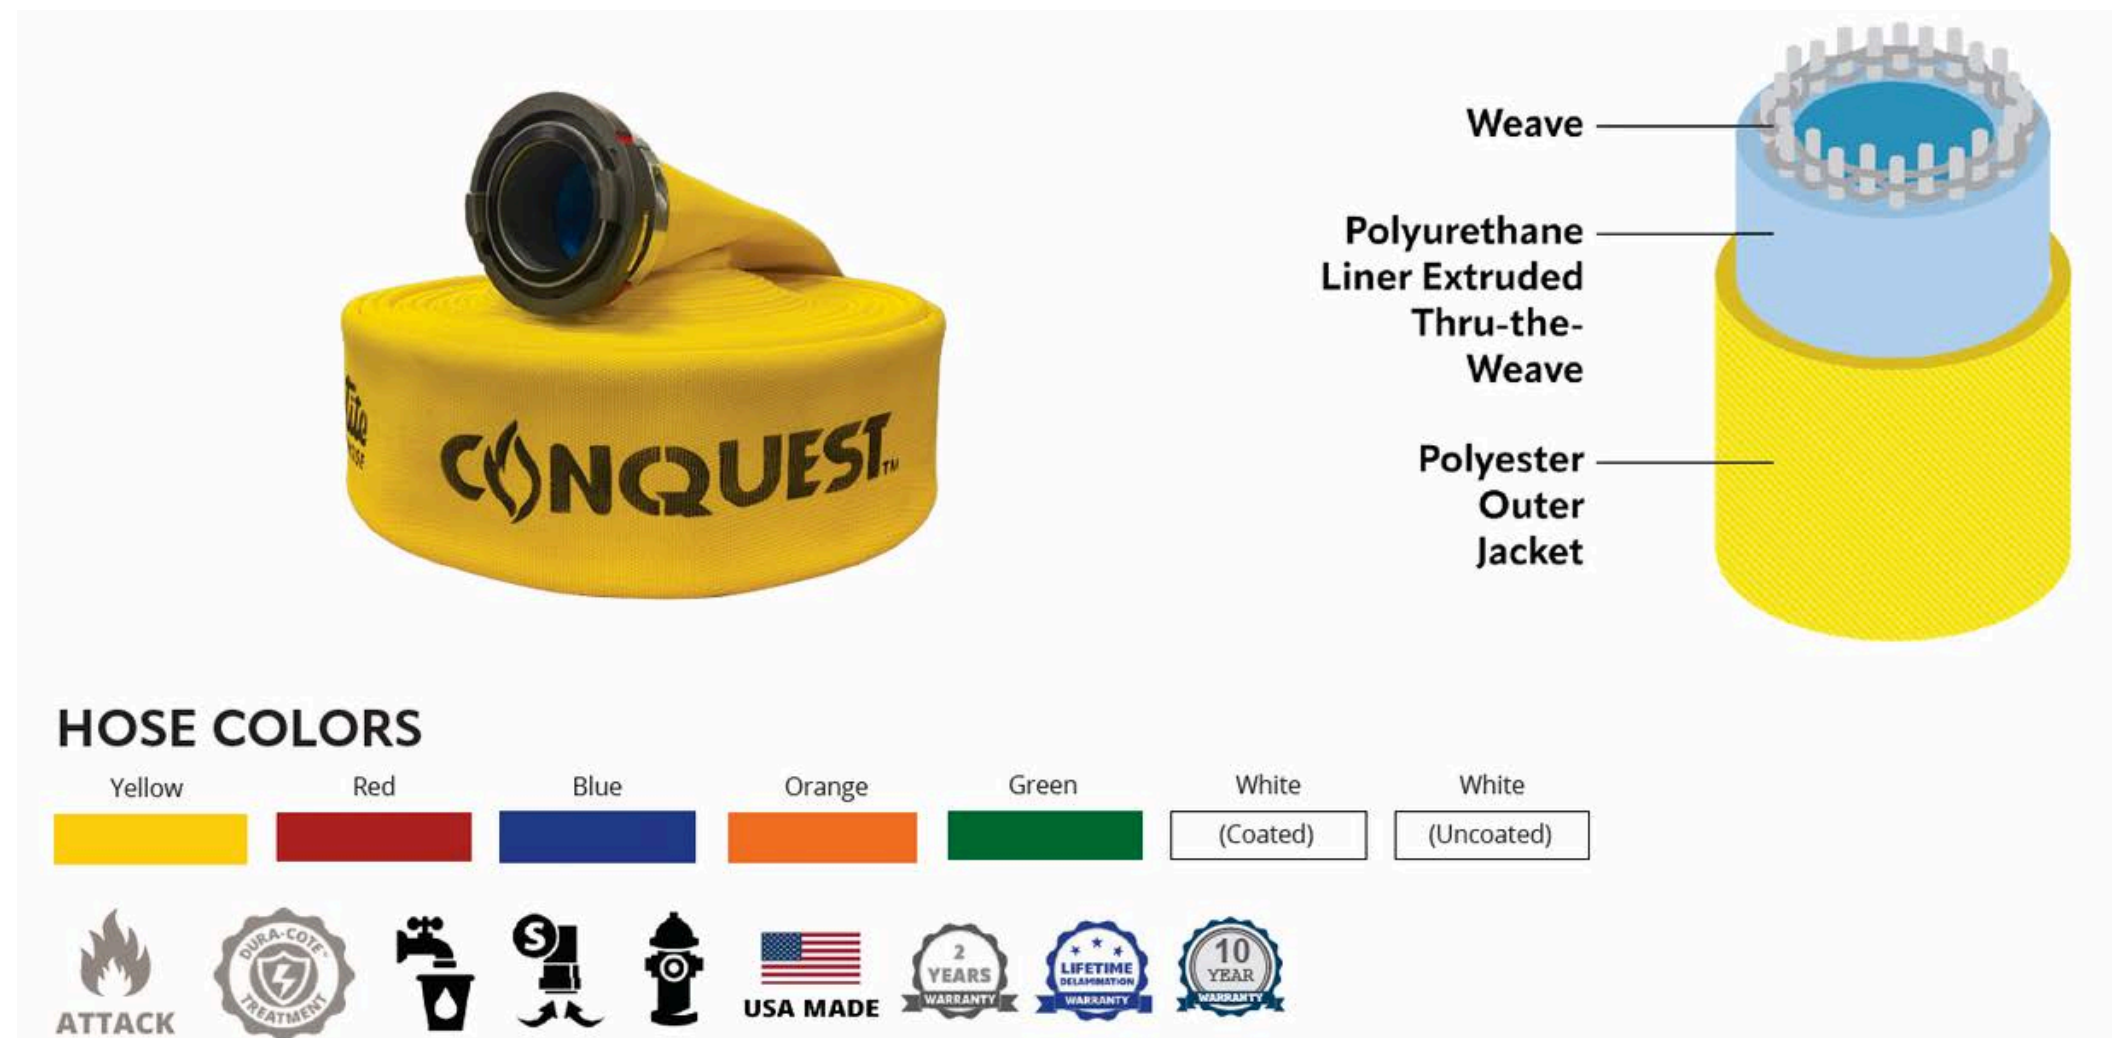



CONQUEST™ LDH

POLYESTER DOUBLE JACKETED ATTACK HOSE

- Looking for a hose to flow a tremendous amount of water? You've found it with CONQUEST™!
- Today's fires are hotter and more water is needed at the nozzle to knock them down fast. Conquest™ meets that challenge.
- Its patented thru-the-weave extruded polyurethane liner has an incredibly smooth surface that enhances water flow.



CONQUEST™ LDH


FEATURES

- Double jacketed fire hose made from 100% high tensile strength polyester outer jacket with extruded thru-the-weave polyurethane inner hose.
- NO ADHESIVE IS USED. The lining will never delaminate.
- Optional Dura-Cote™ treatment.
- Outstanding flow and low friction loss.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and meets all NFPA requirements for ozone resistance.
- Suitable for CAFS and foam concentrates.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



SUPREME™ II

PREMIUM LOW & HIGH PRESSURE ATTACK HOSE

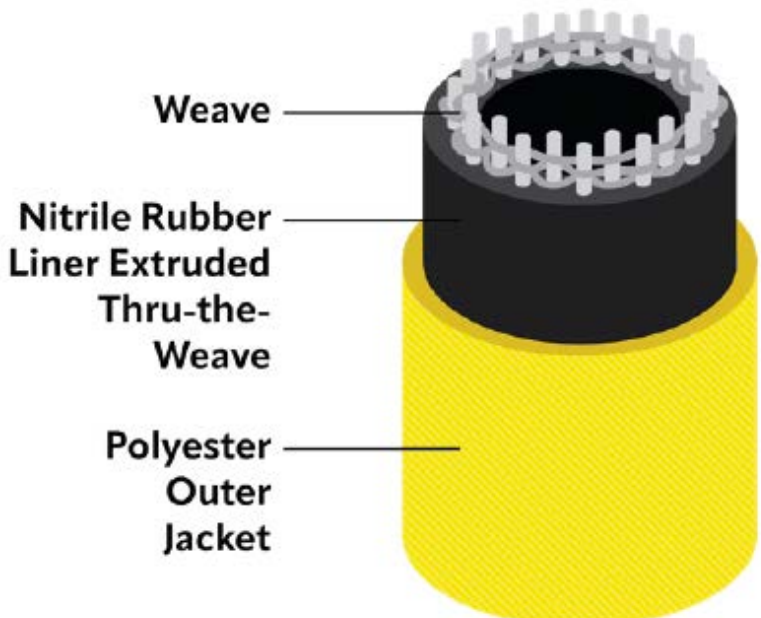

HOSE COLORS

Yellow	Red	Blue	Orange	Green	White (coated)	White (uncoated)
--------	-----	------	--------	-------	----------------	------------------

 ATTACK	 DURA-COTE™ TREATMENT	 USA MADE	 2 YEARS WARRANTY	 LIFETIME DELAMINATION WARRANTY	 10 YEAR WARRANTY
------------	-----------------------------	--------------	-------------------------	--	-------------------------



SUPREME™ II

PREMIUM LOW & HIGH PRESSURE ATTACK HOSE

- Supreme™ II is a premier double jacketed fire hose and one of the best values on the market today.
- Supreme™ has earned its reputation as a top-notch, double-jacketed fire hose. Now, Supreme™ II takes it even further.
- With hose sizes up to 3" and manufactured to exacting standards, Supreme™ II features a polyester outer jacket that encompasses an onyx nitrile rubber thru-the-weave liner.
- Performing well at low and high pressures, Supreme™ II has a smooth and enhanced waterway for better flow and less kinking.



SUPREME™ II


FEATURES

- Premium quality outside jacket with an onyx nitrile rubber thru-the-weave liner construction. NO ADHESIVE IS USED. The lining will never delaminate.
- Kink resistance exceeds that of lightweight jacketed hose.
- Optional Dura-Cote™ treatment and suitable for use with CAFS and foam solutions.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone and oxidation.
- Optional color-coded stripe of one contrasting color can be woven into the outer jacket.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



8D™

POLYESTER DOUBLE JACKETED ATTACK HOSE

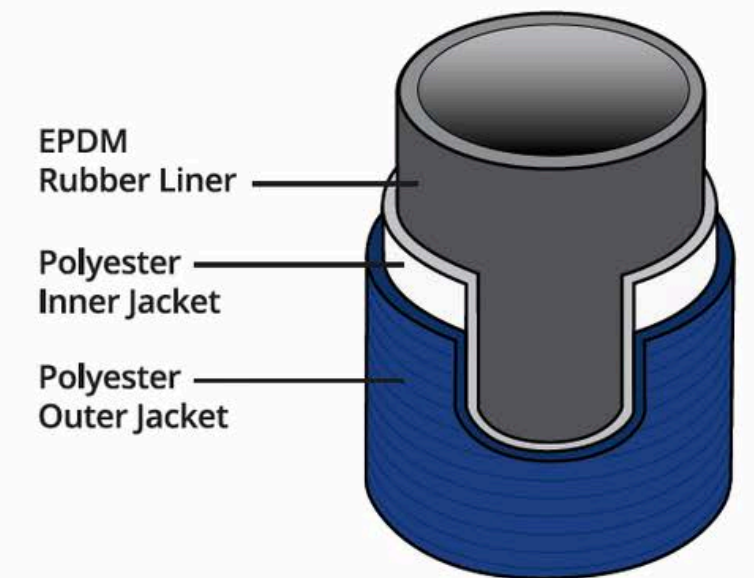

HOSE COLORS



Snap-Tite
HOSE™



8D™

POLYESTER DOUBLE JACKETED ATTACK HOSE

- 8D™ is a double jacketed hose with a lightweight EPDM rubber liner.
- Meets all the requirements of NFPA 1960.
- Designed for use as an attack handline hose and is manufactured to a service test pressure of 400 psi (2758 kPa) to handle all fireground challenges with ease.



8D™


FEATURES

- Double jacketed EPDM rubber lined hose made from 100% high tensile strength polyester yarn.
- Optional Dura-Cote™ protective treatment.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and is highly resistant to ozone and oxidation.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



8T™

LIGHTWEIGHT POLYESTER DOUBLE JACKETED HOSE

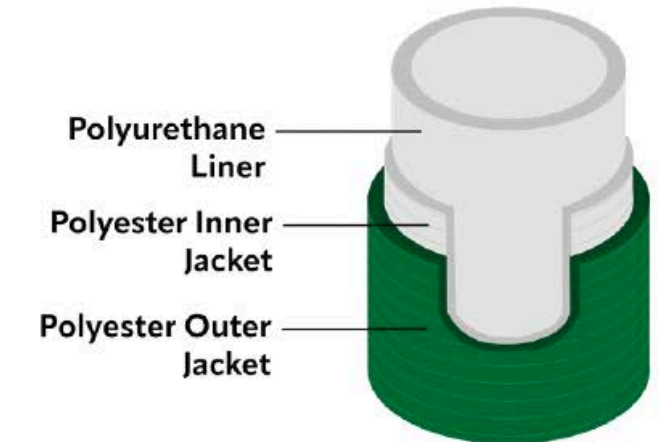

HOSE COLORS



Snap-Tite
HOSE™

A close-up photograph of a fire hose. The hose has a yellow outer jacket and a green inner liner. A grey coupling is visible at the bottom left. The text '8T™' is overlaid in red on the right side of the image.

8T™

LIGHTWEIGHT POLYESTER DOUBLE JACKETED HOSE

- This double jacketed municipal grade fire hose incorporates a lightweight polyurethane liner that meets all the requirements of NFPA 1960.
- 8T™ is designed for use as an attack handline and can be used for potable water transfer in an emergency.
- This double jacketed fire hose is manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001 certified quality assurance system. This hose is a great economical choice for departments of any size.

A close-up photograph of a fire hose. The hose has a yellow outer jacket and a green inner liner. A grey coupling is visible at the bottom left, with the text "HNL 3/4\"/>

8T™


FEATURES

- Double jacketed municipal fire hose made from 100% high tensile strength ring-spun polyester yarn.
- A polyurethane liner reduces weight while remaining kink resistant.
- Optional Dura-Cote™ protective treatment available in NFPA colors.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and is highly resistant to ozone and oxidation.
- Polyurethane lining material meets NSF/ANSI Standard 61 for drinking water.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



5P™

POLYESTER SINGLE JACKET
EPDM RUBBER LINED HOSE

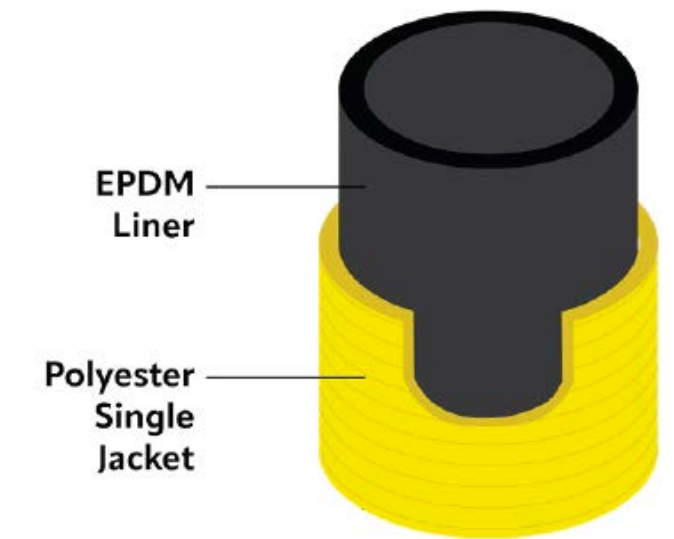

HOSE COLORS

Yellow

Red

White

(uncoated)



Snap-Tite
HOSE™



5P™

POLYESTER SINGLE JACKET EPDM RUBBER LINED HOSE

- The super-duty 5P™ is an excellent all-around performer.
- Delivers medium pressure and high-end performance at a value price point. 5P™ boasts a maximum operating pressure of 250 psi.
- 5P™ is a polyester single jacket hose with a rugged Ethylene Propylene Diene Monomer (EPDM) rubber liner that can handle most fluids, including some petrochemicals.
- Can be enhanced with optional Dura-Cote™ treatment for a higher level of abrasion resistance.



5P™

FEATURES

- Single jacket, polyester, EPDM rubber lined hose.
- Optional Dura-Cote™ protective treatment.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone and oxidation.
- Available with aluminum or brass couplings.
- Designed for the following applications: General industrial and construction use; discharge hose; in-plant fire protection; wash down and maintenance.
- 1 1/2" and 2 1/2" sizes are UL, ULC, and FM certified.




LD™

LIGHTWEIGHT EXTRUDED RUBBER HOSE



Nylon Fabric
Reinforcement

Nitrile Rubber
Thru-the-Weave

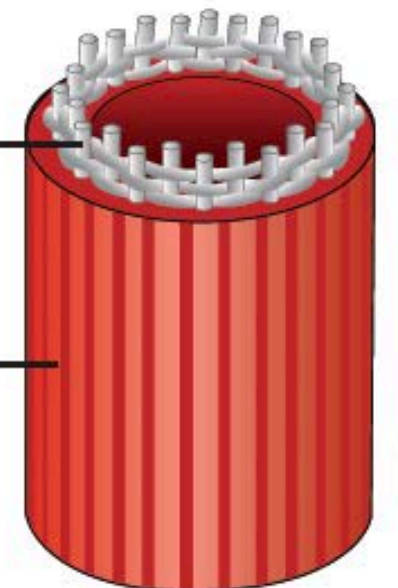

HOSE COLORS

Yellow

Red

Blue



ATTACK



HIGH-RISE



USA MADE



Snap-Tite
HOSE™



LD™

LIGHTWEIGHT EXTRUDED RUBBER HOSE

- Durable, dependable, and better by design.
- LD™ is a premium quality extruded thru-the-weave, nitrile rubber fire hose.
- It's an easily coiled, non-kinking, and high flow hose that also resists abrasion, chemicals, and weathering by ozone.



LD™


FEATURES

- Extruded thru-the-weave, nitrile rubber fire hose. The reinforcement has circular woven, twill weave, and nylon fibers.
- Highly resistant to both conductive and radiant heat.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Maintenance free, no drying required, and is easily cleaned.
- Lightweight and kink resistant at low pressures.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



UTX™ LDH

LIGHTWEIGHT SUPPLY LINE

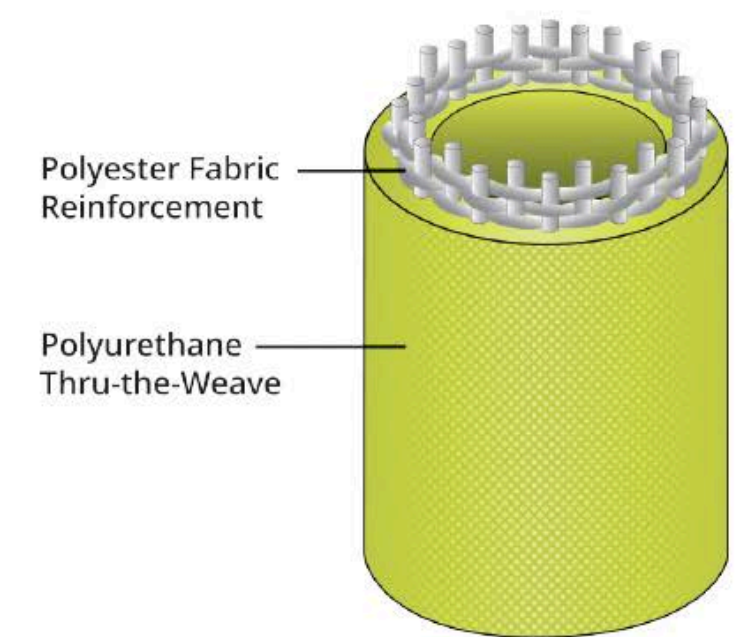

HOSE COLORS



USA MADE



Snap-Tite
HOSE™



UTX™ LDH

LIGHTWEIGHT SUPPLY LINE

- UTX™ LDH is a high-visibility, lightweight supply line.
- This hose features a polyurethane outer cover with an exclusive thru-weave polyurethane liner to offer greater resistance to punctures and abrasion.
- UTX™ is compact, taking up less room in the hose bed, and durable - with higher resistance to oils, chemicals, and ozone.
- Snag proof and kink resistant, UTX™ will not mildew or rot and is guaranteed for life to never delaminate.



UTX™ LDH


FEATURES

- UTX™ LDH incorporates a circular woven polyester jacket that is completely encapsulated by an extruded thru-the-weave polyurethane cover and liner.
- UTX™ weighs 20% less than conventional rubber supply hose.
- Extruded thru-the-weave polyurethane construction and ultra-smooth liner minimize friction loss.
- Engineered to deliver more flow and more efficient packability.
- Remains flexible to -50°F (-46°C) and resists ozone, oxidation, and most chemical/petroleum products.
- Manufactured in accordance with NFPA 1960 Standard, latest edition. Made in USA to ISO-9001:2015 certified quality management system.



TPX™

3-PLY EXTRUDED HOSE

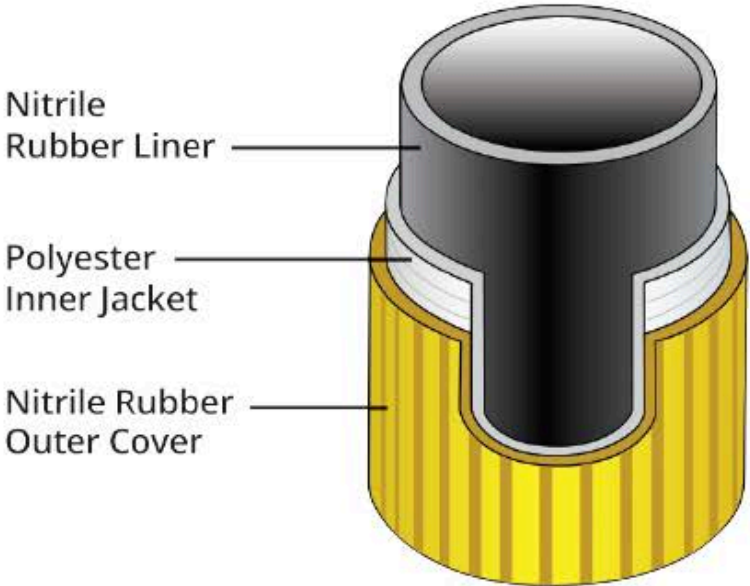

HOSE COLORS





TPX™

3-PLY EXTRUDED HOSE

- TPX™ utilizes a design where the ribbed cover and smooth nitrile liner are extruded independently.
- The cover is inserted inside the tight-weave reinforcement, vulcanized, and turned inside out.
- The liner is inserted and the hose is vulcanized for a second time to form a bond of all three plies, guaranteeing a consistent, compact hose wall.
- The Snap-tite TPX™ is highly resistant to both conductive and radiant heat.



TPX™


FEATURES

- 3-ply rubber industrial hose with both the cover and liner made of heavy duty nitrile rubber, high tensile strength tightly woven polyester reinforcement for maximum durability and flexibility.
- Smooth liner keeps friction loss to a minimum.
- Nitrile rubber cover greatly increases abrasion resistance and the tightly woven reinforcement resists puncture.
- Suitable for attack and soft sleeve suction applications.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



TPX™ LDH

3-PLY EXTRUDED HOSE

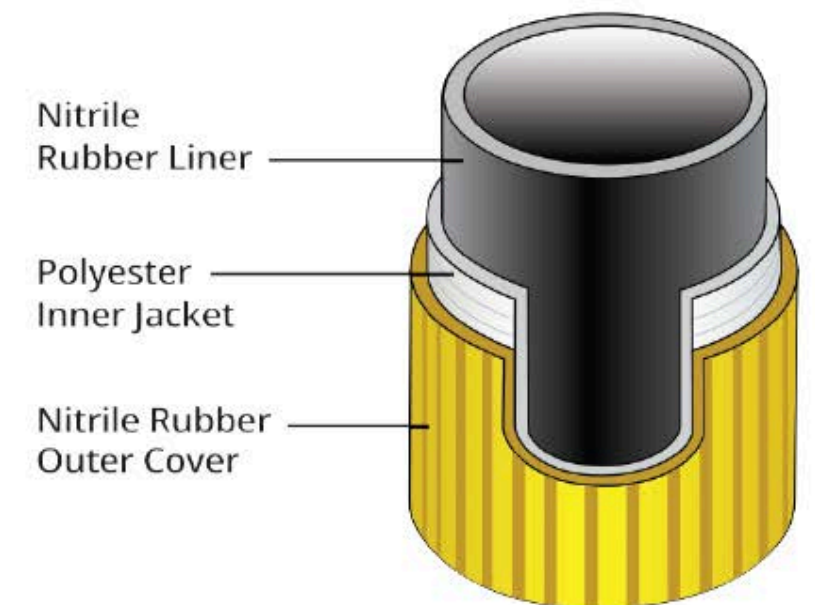

HOSE COLORS



Snap-Tite
HOSE™



TPX™ LDH

3-PLY EXTRUDED HOSE

- TPX™ utilizes a design where the ribbed cover and smooth nitrile liner are extruded independently.
- The cover is inserted inside the tight-weave reinforcement, vulcanized, and turned inside out.
- The liner is inserted and the hose is vulcanized for a second time to form a bond of all three plies, guaranteeing a consistent, compact hose wall.
- The Snap-tite TPX™ is highly resistant to both conductive and radiant heat.



TPX™ LDH


FEATURES

- 3-ply rubber industrial hose with both the cover and liner made of heavy duty nitrile rubber, high tensile strength tightly woven polyester reinforcement for maximum durability and flexibility.
- Smooth liner keeps friction loss to a minimum.
- Nitrile rubber cover greatly increases abrasion resistance and the tightly woven reinforcement resists puncture.
- Suitable for supply and soft sleeve suction applications.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



ATX™

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

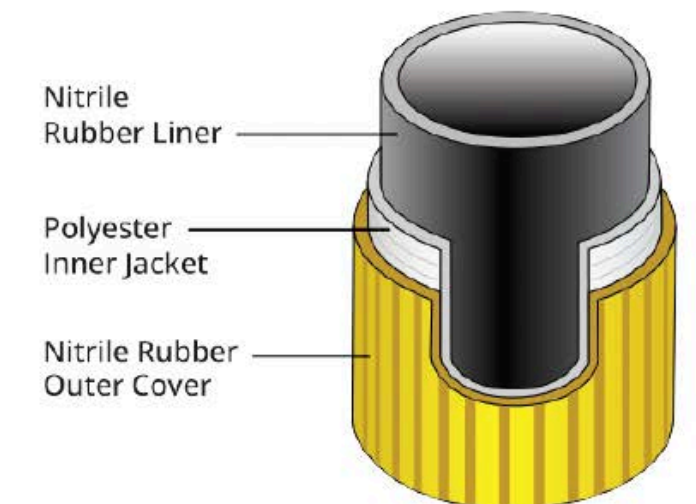

HOSE COLORS



ATTACK



SUPPLY



USA MADE



LIFETIME
DELAMINATION
WARRANTY



2
YEARS
WARRANTY



10
YEAR
WARRANTY

Snap-Tite
HOSE™



ATX™

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

- Manufactured in a similar process as TPX™, ATX™ utilizes a 3-ply design where the cover and liner are extruded independently and double vulcanized to guarantee a consistent, compact hose wall.
- The polyester reinforcement can then be woven tighter, making this hose more resistant to puncture while also being easier to pack and store.
- ATX™ has a stronger jacket which increases the service test pressure of the LDH sizes to 300 psi.



ATX™

FEATURES

- 3-ply rubber hose with both the cover and liner made of heavy duty nitrile rubber.
- Smooth liner keeps friction loss to a minimum for greater flow.
- Nitrile rubber cover greatly increases abrasion resistance and the reinforced jacket resists punctures.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Engineered to meet the requirements of high pressure applications. Designed for relay pumping, pressurizing standpipes, and sprinkler systems.
- Manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.



HFX™

EXTRUDED NITRILE RUBBER ATTACK HOSE



HOSE COLORS

Yellow

Red



ATTACK



USA MADE



Snap-Tite
HOSE™



HFX™

EXTRUDED NITRILE RUBBER ATTACK HOSE

- HFX™ is a nitrile thru-the-weave, rubber covered fire hose that utilizes polyester and nylon 6.6 yarn in the reinforcing jacket.
- Under pressure, the polyester keeps the hose from snaking, while the nylon allows for controlled dilation, reducing friction loss, and generating higher flow rates.
- Our special rubber compound provides a tough cover that resists heat, abrasion, snags, and hot embers.
- The interlocking matrix also means no adhesives are used and there is a permanent bond to all the warp and weft yarns.



HFX™


FEATURES

- The reinforcement is made with a blend of circular woven, twill weave, polyester, and nylon fibers.
- The ribs on the cover surface greatly increase abrasion resistance and help provide a long service life.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Suitable for attack, soft sleeve suction, and relay applications.
- Unique extruded nitrile rubber thru-the-weave construction provides a flexible, easy to maneuver hose that is easy to pack.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.



HFX™ LDH

EXTRUDED NITRILE RUBBER SUPPLY HOSE

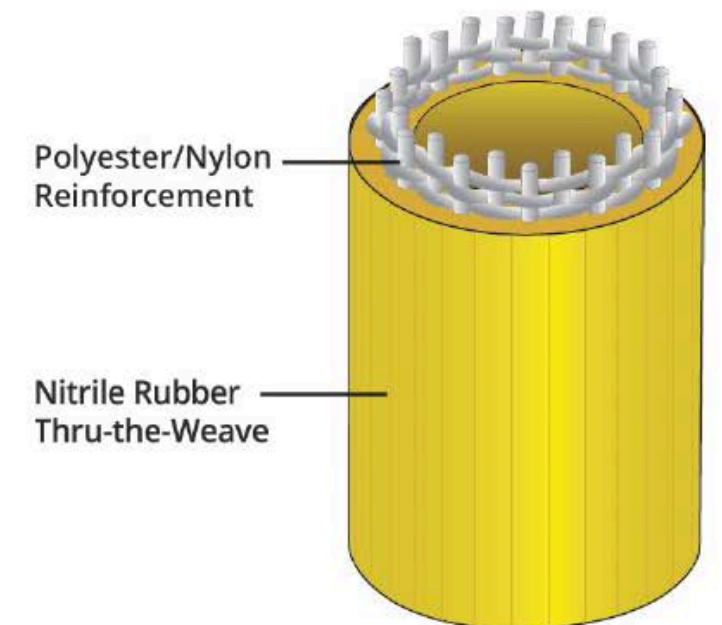

HOSE COLORS

Yellow

Red



USA MADE



Snap-Tite
HOSE™



HFX™ LDH

EXTRUDED NITRILE RUBBER SUPPLY HOSE

- HFX™ is a nitrile thru-the-weave, rubber covered fire hose that utilizes polyester and nylon 6.6 yarn in the reinforcing jacket.
- Under pressure, the polyester keeps the hose from snaking, while the nylon allows for controlled dilation, reducing friction loss, and generating higher flow rates.
- Our special rubber compound provides a tough cover that resists heat, abrasion, snags, and hot embers.
- The interlocking matrix also means no adhesives are used and there is a permanent bond to all the warp and weft yarns.



HFX™ LDH

FEATURES

- The reinforcement is made with a blend of circular woven, twill weave, polyester, and nylon fibers.
- The ribs on the cover surface greatly increase abrasion resistance and help provide a long service life.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Suitable for supply, soft sleeve suction, and relay applications.
- Unique extruded nitrile rubber thru-the-weave construction provides a flexible, easy to maneuver hose that is easy to pack.
- Manufactured in accordance with NFPA 1960 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

WHY CHOOSE SNAP-TITE?



As the only ISO 9001: 2015 certified lay-flat hose manufacturer in North America, Snap-tite Hose offers a solution tailored to the unique needs of firefighters, providing durable, high-performance hoses that ensure operational readiness, safety, and long-term reliability. The key features that make Snap-tite Hose an ideal choice include:

Durability: Built with advanced materials, Snap-tite hoses withstand extreme conditions, including high pressures, intense heat, and rough handling.

Reliability: Snap-tite Hose is trusted by fire departments across the country for its consistent, high-quality performance. Their hoses have a proven track record of reliability in critical situations.

Compliance with Standards: Snap-tite products meet or exceed industry standards, including UL requirements.

Complete solution: Snap-tite offers your complete solution for municipal operations.