


The image features a close-up of a red fire hose with a black Snap-Tite coupling. The coupling is a rectangular metal piece with a textured surface and a small latch on top. The Snap-Tite logo is embossed on the side of the coupling. The hose is coiled on a dark, gravelly surface. The background is a dark, textured surface, possibly asphalt or gravel.

Snap-Tite
HOSE™

MUNICIPAL
QUICK HOSE
GUIDE

ICON GUIDE:

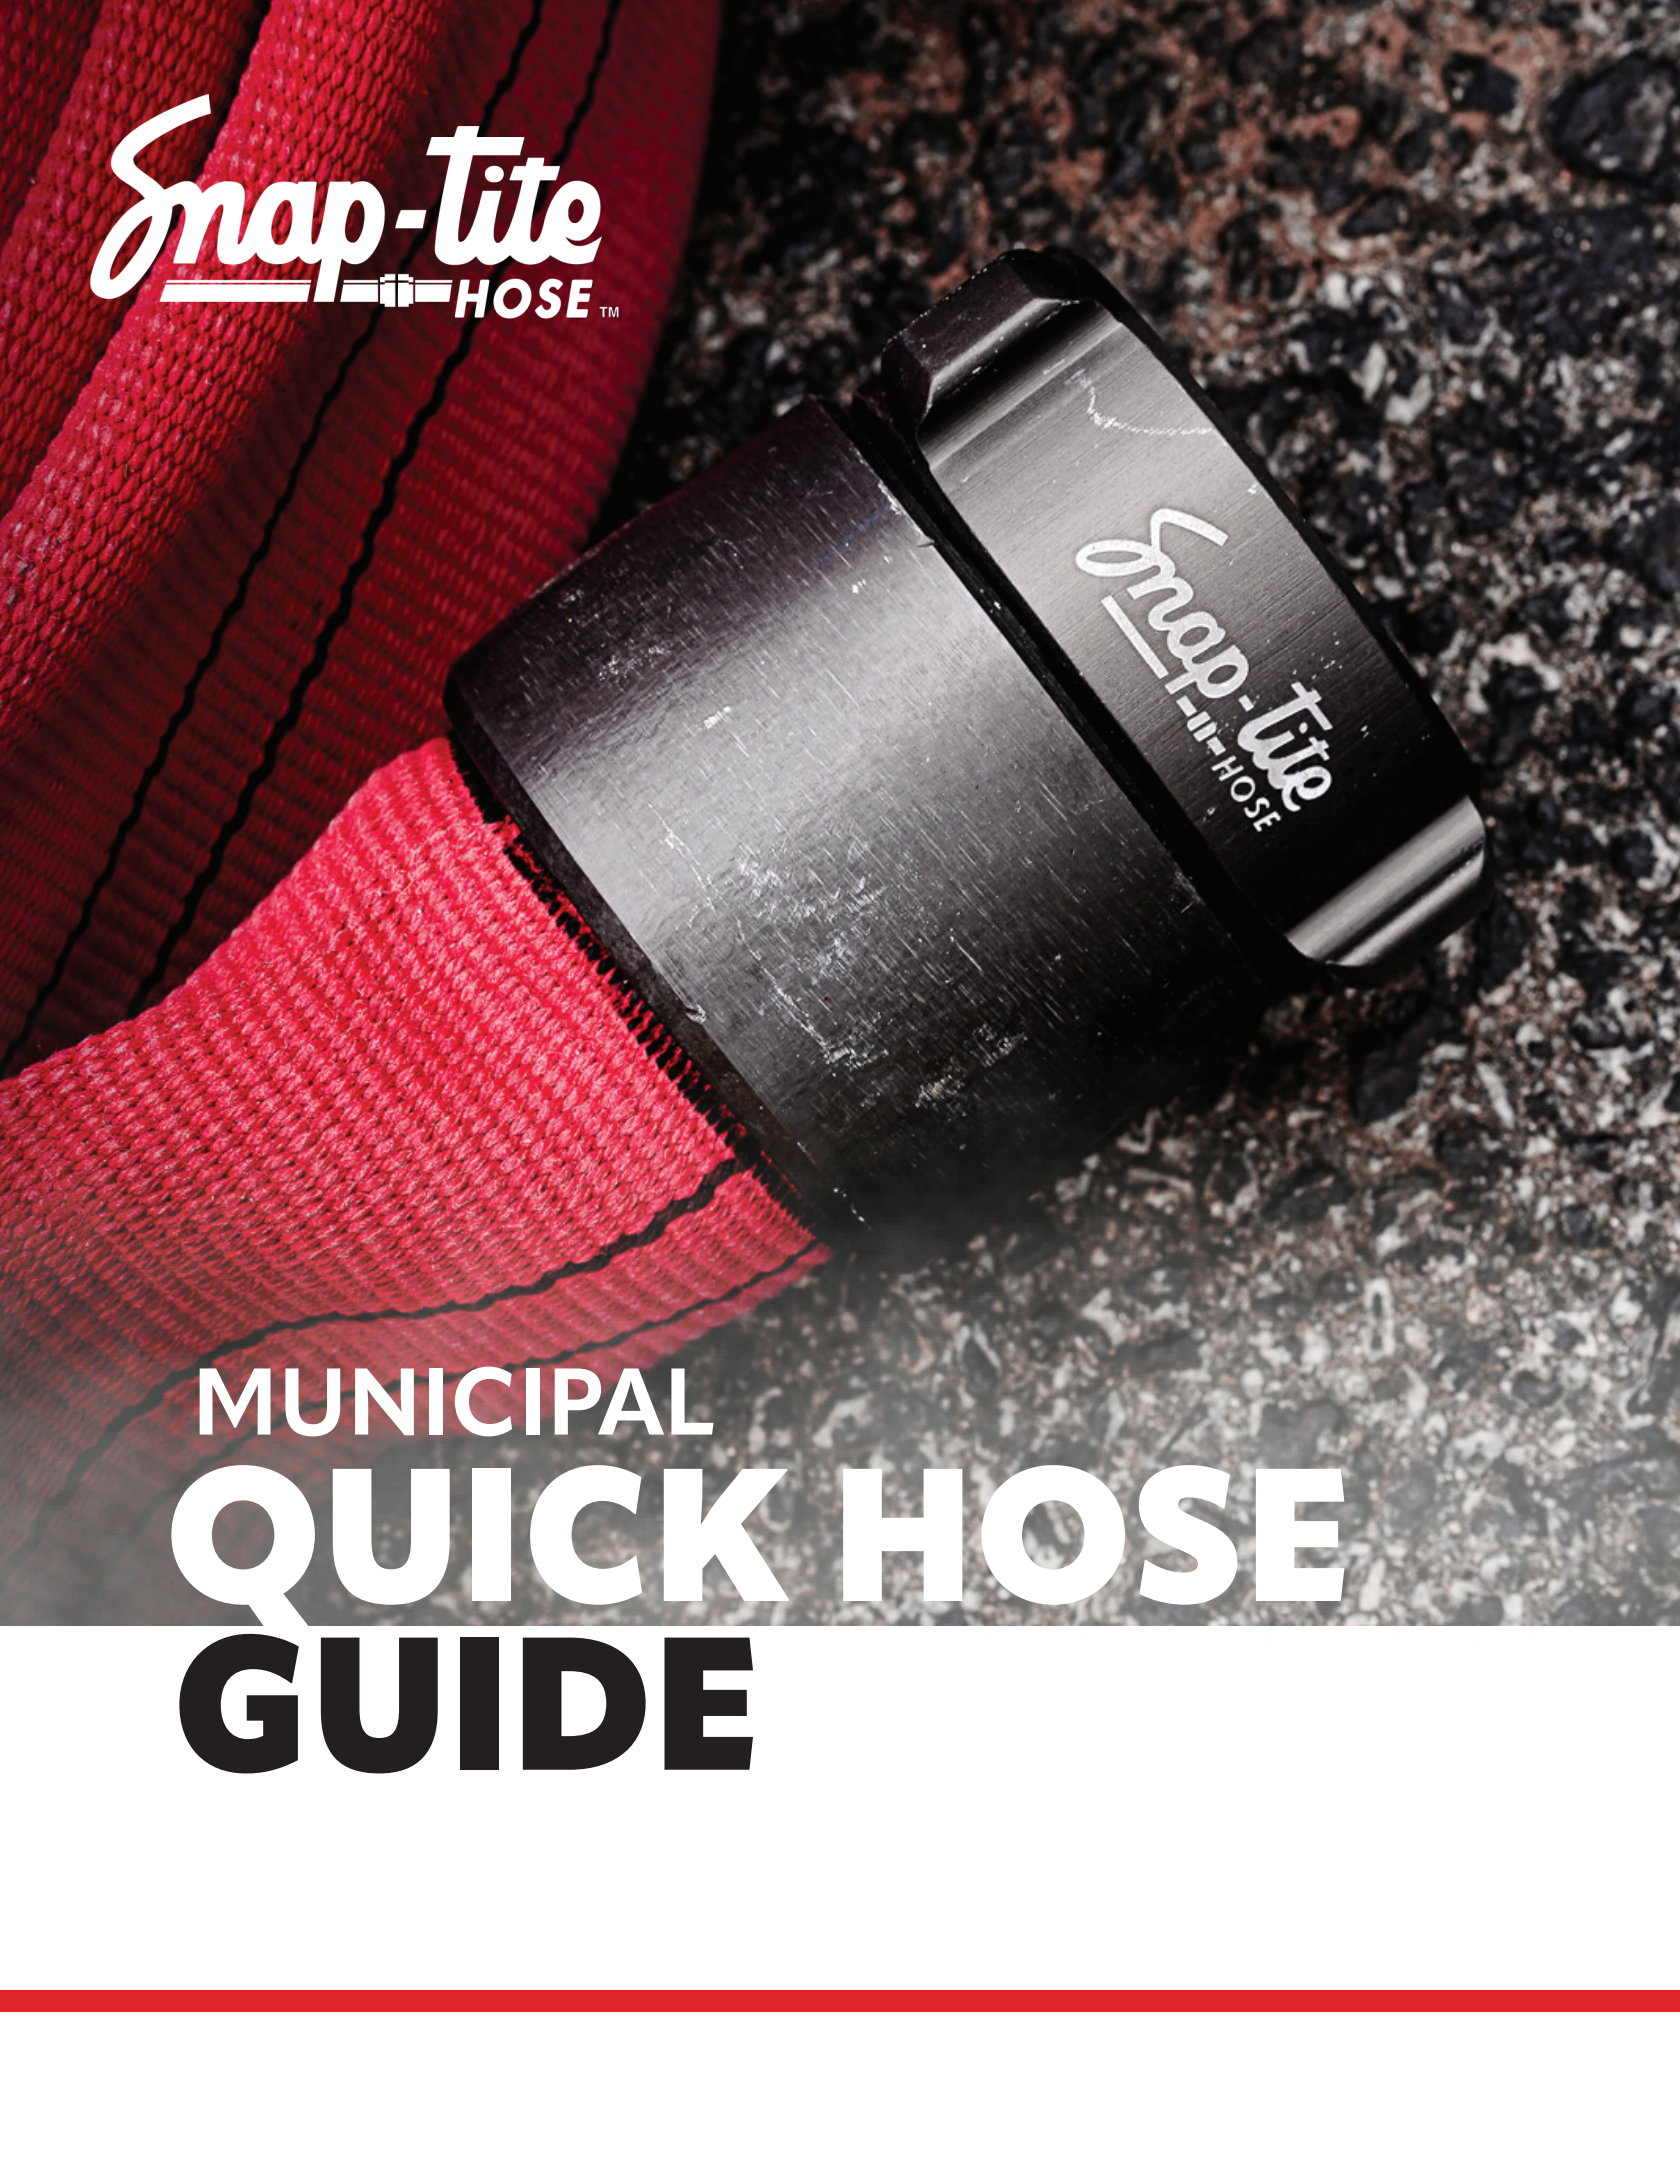

AMERICAN MADE

ISO 9001: 2015 CERTIFIED QUALITY MANAGEMENT SYSTEM



1-YEAR WARRANTY



2-YEAR ALL HAZARD WARRANTY



3-YEAR ALL HAZARD WARRANTY



10-YEAR WARRANTY



LIFETIME WARRANTY AGAINST DELAMINATION



KLEAN HOSE



ATTACK HOSE



SUPPLY LINE HOSE



SOFT SUCTION HOSE



POTABLE WATER HOSE



HIGH-RISE HOSE



PRODUCT OFFERINGS



WARRIOR™



- Proprietary para aramid outer jacket material with a thru-the-weave nitrile rubber liner construction.
- Recommended flow pressure: 50 - 100 psi.
- 60 minutes of radiant testing at 30 kw/m² of heat flux without failure.
- More than three times the abrasion resistance of any current hose on the market.
- An attack line designed with a 1.77" or 1.88" ID waterway.
- UL-19 heat resistance type: Type 1
- Application: Attack, Low PSI, CAFS.

SIZES: 1-1/2", 1-3/4", 2-1/2"

COLORS: NATURAL



GLADIATOR™



- Premium quality, outside jacket with a nitrile rubber thru-the-weave inner liner construction.
- Recommended flow pressure: 50 - 100 psi.
- Suitable for CAFS and foam concentrates.
- FGN - Designed for a 7/8" Smooth Tip, to be flowed at 160 GPM flow rate.
- An attack line designed with a 1.77" or 1.88" ID waterway.
- UL-19 heat resistance type: Type 2 (FG 1-3/4", 2-1/2")
- Application: Attack, Low PSI, CAFS.

SIZES: 1-1/2", 1-3/4", 2", 2-1/2"

COLORS: COATED UNCOATED COATED UNCOATED UNCOATED



CONQUEST™



- Patented double jacketed fire hose made from 100% high tensile strength polyester outer jacket with extruded thru-the-weave polyurethane inner hose.
- Recommended flow pressure: 75 - 100 psi.
- Outstanding flow and low friction loss.
- Suitable for CAFS and foam concentrates.
- The polyurethane lining materials meets NSF/ANSI Standard 61 for drinking water.
- UL-19 heat resistance type: Type 2 (1-3/4", 2-1/2")
- Application: Attack, High Rise, CAFS, Potable Water.


SIZES: 1-3/4", 2", 2-1/2", 3"

COLORS: COATED UNCOATED COATED UNCOATED UNCOATED

*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

SCAN ME TO LEARN MORE



CONTACT US

- 📞 814-438-7616
- ✉ customerservice@snaptitehose.com
- 🌐 snaptitehose.com



PRODUCT OFFERINGS



CONQUEST™ LDH



- Patented double jacketed fire hose made from 100% high tensile strength polyester outer jacket with extruded thru-the-weave polyurethane inner hose.
- Outstanding flow and low friction loss.
- Suitable for CAFS and foam concentrates.
- The polyurethane lining materials meets NSF/ANSI Standard 61 for drinking water.
- Application: Attack, Supply, CAFS, Potable Water.

SIZES: 4", 5", 6"

COLORS:      ☐ COATED ☐ UNCOATED



SUPREME™ II



- Premium polyester double jacketed fire hose with an onyx nitrile rubber thru-the-weave liner.
- Recommended flow pressure: 50 - 100 psi.
- Features a smooth and enhanced waterway for better flow and less kinking.
- Suitable for CAFS and foam concentrates.
- UL-19 heat resistance type: Type 2
- Application: Attack, CAFS.

SIZES: 1-1/2", 1-3/4", 2", 2-1/2", 3"

COLORS:      ☐ COATED ☐ UNCOATED



8D™



- Double jacketed EPDM rubber lined hose made from 100% high tensile strength polyester yarn.
- Recommended flow pressure: 100 psi.
- Highly resistant to ozone and oxidation.
- UL-19 heat resistance type: Type 2 (1-3/4", 2-1/2")
- Application: Attack.


SIZES: 1", 1-1/2", 1-3/4", 2", 2-1/2", 3"

COLORS:      ☐ COATED ☐ UNCOATED

*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

SCAN ME TO LEARN MORE



CONTACT US

- 📞 814-438-7616
- ✉ customerservice@snaptitehose.com
- 🌐 snaptitehose.com



PRODUCT OFFERINGS



8T™



- Double jacketed, polyester, polyurethane lined hose.
- Recommended flow pressure: 100 psi.
- Highly resistant to ozone and oxidation.
- The polyurethane lining materials meets NSF/ANSI Standard 61 for drinking water.
- UL-19 heat resistance type: Pending
- Application: Attack.

SIZES: 1-1/2", 1-3/4", 2-1/2", 3"

COLORS:      COATED UNCOATED

5P™



- Single jacket, polyester, EPDM rubber lined hose.
- Resistant to most petrochemicals.
- Available with aluminum or brass couplings.
- UL-19 heat resistance type: Type 3 (1-1/2", 2-1/2")
- Applications: Industrial.

SIZES: 1-1/2", 2", 2-1/2"

COLORS:   UNCOATED

LD™



- Extruded thru-the-weave, nitrile rubber fire hose with reinforcement via circular woven, polyester, and nylon fibers.
- Highly resistant to both conductive and radiant heat.
- Lightweight and kink resistant at low pressures makes this hose superior for high rise firefighting.
- UL-19 heat resistance type: Type 3 (2-1/2")
- Application: Attack, High Rise.


SIZES: 1", 1-1/2", 1-3/4", 2", 2-1/2", 2-3/4"

COLORS:   

*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

SCAN ME TO LEARN MORE



CONTACT US

- 📞 814-438-7616
- ✉ customerservice@snaptitehose.com
- 🌐 snaptitehose.com



PRODUCT OFFERINGS



UTX™



- Woven, polyester jacket construction with an extruded thru-the-weave polyurethane cover and liner.
- UTX™ is the most compact, flexible, and lightest LDH on the market.
- Resists ozone, oxidation, and most chemical/petroleum products.
- Ergonomically designed and constructed to be up to 30 lbs (per 100 ft) lighter than conventional LDH.
- Application: Supply.

SIZES: 4", 5"

COLORS:   BLAZE  HI-VIZ



TPX™



- 3-ply nitrile rubber cover/liner with polyester inner jacket.
- Unique 3-ply design affords incredible strength but with a lightweight profile, making it easy to manage on the fireground and virtually eliminating snaking.
- Lays flat, requiring less hose bed space than typical extruded hose.
- TPX™: UL-19 heat resistance type: Pending
- TPX™ Application: Attack.
- TPX™ LDH Application: Supply.

SIZES: 1-3/4", 2", 2-1/2", 3", 4", 5", 6", 8"

COLORS:   



ATX™



- Heavy gauge 3-ply nitrile rubber cover/liner with polyester inner jacket.
- Smooth liner keeps friction loss to a minimum for greater flow.
- Engineered to meet the requirements of high pressure applications. Designed for relay pumping, pressurizing standpipes and sprinkler systems.
- Application: Attack, Supply.


SIZES: 4", 5", 6"

COLORS:   

*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

SCAN ME TO LEARN MORE



CONTACT US

 814-438-7616
 customerservice@snaptitehose.com
 snaptitehose.com



PRODUCT OFFERINGS

HFX™



- Extruded thru-the-weave, nitrile rubber construction with a polyester and nylon reinforcing jacket.
- Construction creates a concentric, flexible, and maneuverable hose that is also easy to pack.
- Ribs on the cover surface greatly increase abrasion resistance and help provide a long service life.
- HFX™: UL-19 Type 2 heat resistance (1-3/4"), Type 3 heat resistance (1-1/2", 2-1/2").
- HFX™ Application: Attack.
- HFX™ LDH Application: Supply.

SIZES: 1", 1-1/2", 1-3/4", 2", 2-1/2", 3", 4", 5", 6"


COLORS:  



*For UL/ULC information, visit our website.

All Snap-tite Hose products are manufactured in accordance with NFPA 1960 standard, latest edition within our ISO-9001:2015 certified quality assurance system.

SCAN ME TO LEARN MORE



CONTACT US

-  814-438-7616
-  customerservice@snaptitehose.com
-  snaptitehose.com

NOTES:

