



INDUSTRIAL OPERATION SOLUTIONS

JANUARY 2025



CORE VALUES

The Snap-tite Promise



PEOPLE

We have a culture of continuous improvement. We foster a perpetual state of learning, emphasizing that it's not just a job, it's a career.



PROTECTION

Our hoses are designed to protect against a range of external factors, such as abrasion, chemicals, heat, and weather conditions.



PERFORMANCE

Snap-tite hoses are engineered to deliver high performance in pressure rating, temperature resistance, flexibility, and overall durability.



INNOVATION

Our hose embodies the development and application of the most advanced, groundbreaking technology. Innovations and solutions.



Snap-tite has earned its place as a market leader in the design and manufacture of rugged, dependable industrial hose. With exceptional quality and field performance as the standard, our comprehensive product line includes lay-flat single jacket, double jacket, rubber, and polyurethane hoses for industrial firefighting applications.





CONQUEST™ LDH

POLYESTER DOUBLE JACKETED SUPPLY HOSE



Weave

Polyurethane Liner Extruded Thru-the-Weave

Polyester Outer Jacket



HOSE COLORS

Yellow	Red	Blue	Orange	Green	White (Coated)	White (Uncoated)

ATTACK

DURA-COTE™ TREATMENT

USA MADE

LIFETIME DELAMINATION WARRANTY

1 YEAR WARRANTY



CONQUEST™ LDH

POLYESTER DOUBLE JACKETED SUPPLY HOSE

- Looking for a hose to flow a tremendous amount of water? You've found it with CONQUEST™!
- Today's fires are hotter and more water is needed at the nozzle to knock them down fast. Conquest™ meets that challenge.
- Its patented thru-the-weave extruded polyurethane liner has an incredibly smooth surface that enhances water flow.



CONQUEST™ LDH


FEATURES

- Double jacketed fire hose made from 100% high tensile strength polyester outer jacket with extruded thru-the-weave polyurethane inner hose.
- NO ADHESIVE IS USED. The lining will never delaminate.
- Optional Dura-Cote™ treatment.
- Outstanding flow and low friction loss.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and meets all NFPA requirements for ozone resistance.
- Suitable for CAFS and foam concentrates.
- Made in USA to ISO-9001:2015 certified quality assurance system.



8D™

POLYESTER DOUBLE JACKETED ATTACK HOSE

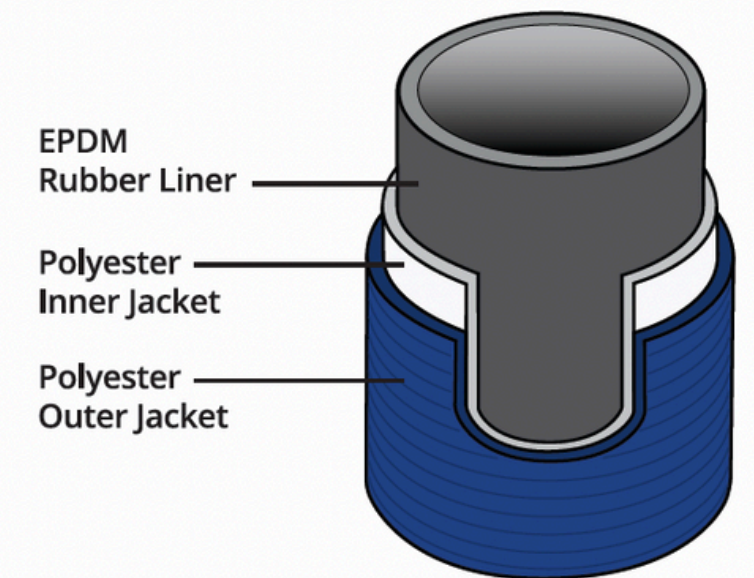

HOSE COLORS



Snap-Tite
HOSE™



8D™

POLYESTER DOUBLE JACKETED ATTACK HOSE

- Snap-tite's 8D™ is a premium quality, industrial grade, double jacketed hose with a lightweight EPDM rubber liner and a maximum operating pressure of 400 psi (2758 kPa).
- Outside jacket utilizes a tight weave that is less likely to “catch” while dragging through the work site and helps to reduce kinking at low pressures, keeping the flow constant.
- The EPDM liner is inert to most chemicals, is inherently ozone resistant, and won't degrade or crack.

A photograph of an industrial facility, likely a refinery or chemical plant, at dusk or dawn. Several tall smokestacks are visible, with bright orange and yellow flames or smoke rising from them. The foreground shows a complex network of pipes and structural elements, illuminated by warm lights from within the facility. The sky is a deep blue with some lighter clouds.

8D™


FEATURES

- Double jacketed EPDM rubber lined hose made from 100% high tensile strength polyester yarn.
- Optional Dura-Cote™ protective treatment.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and is highly resistant to ozone and oxidation.
- Made in USA to ISO-9001:2015 certified quality assurance system.



8T™

LIGHTWEIGHT POLYESTER DOUBLE JACKETED HOSE

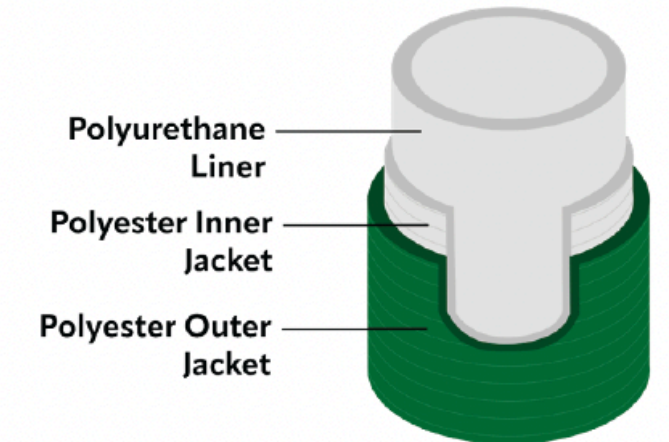

HOSE COLORS



Snap-Tite
HOSE™



8T™

LIGHTWEIGHT POLYESTER DOUBLE JACKETED HOSE

- 8T™ is a premium quality, industrial grade, double jacketed hose with a lightweight polyurethane liner and a maximum operating pressure of 400 psi (2758 kPa).
- Outside jacket utilizes a tight weave that is less likely to “catch” while dragging through the work site and helps to reduce kinking at low pressures, keeping the flow constant.
- The polyurethane liner material meets NSF Standard 61 for potable water use and can be used as a hydrant or water main bypass in an emergency.




8T™

FEATURES

- Double jacketed, polyurethane-lined hose made from 100% high tensile strength polyester yarn.
- Optional Dura-Cote™ protective treatment available.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and is highly resistant to ozone and oxidation.
- Excellent for tough applications such as construction sites, mines and industrial firefighting.
- Available with aluminum or brass couplings.
- Made in USA to ISO-9001:2015 certified quality assurance system.

5P™

POLYESTER SINGLE JACKET EPDM RUBBER LINED HOSE

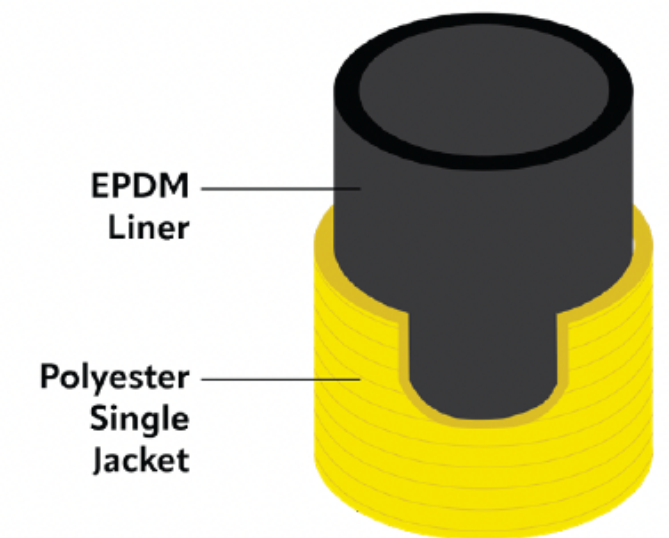

HOSE COLORS

Yellow



Red



White

(uncoated)



Snap-Tite
HOSE™



5P™

POLYESTER SINGLE JACKET EPDM RUBBER LINED HOSE

- 5P™ is a medium pressure hose that is tough enough to meet most application requirements, while remaining economical for your budget.
- 5P™ is a polyester, single jacket style hose with an EPDM rubber liner that can handle most fluids, including some chemicals and petroleum-based products.
- It has a maximum operating pressure of 250 psi (1723 kPa) and can be treated with our optional Dura-Cote™ treatment for a higher level of abrasion resistance while preventing water-pickup.



5P™

FEATURES

- Single jacket, polyester, EPDM rubber lined hose.
- Optional Dura-Cote™ protective treatment.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone and oxidation.
- Available with aluminum or brass couplings.
- Designed for the following applications: General industrial and construction use; discharge hose; in-plant fire protection; wash down and maintenance.
- 1 1/2" and 2 1/2" sizes are UL, ULC, and FM certified.
- Made in USA to ISO-9001:2015 certified quality assurance system.



LD™

LIGHTWEIGHT EXTRUDED RUBBER HOSE



HOSE COLORS

Yellow

Red

Blue



ATTACK



USA MADE



Snap-Tite
HOSE™



LD™

LIGHTWEIGHT EXTRUDED RUBBER HOSE

- Durable, dependable, and better by design.
- LD™ is a premium quality extruded thru-the-weave, nitrile rubber hose.
- It's an easily coiled, non-kinking, and high flow hose that also resists abrasion, chemicals, and weathering by ozone.

A photograph of an industrial facility, likely a refinery or chemical plant, featuring tall distillation columns, complex piping, and scaffolding against a hazy sky.

LD™

FEATURES

- Extruded thru-the-weave, nitrile rubber fire hose. The reinforcement has circular woven, twill weave, and nylon fibers.
- Highly resistant to both conductive and radiant heat.
- Hose remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Maintenance free, no drying required, and is easily cleaned.
- Lightweight and kink resistant at low pressures.
- Made in USA to ISO-9001:2015 certified quality assurance system.

HFX™ & HFX™ LDH

EXTRUDED NITRILE RUBBER ATTACK HOSE



HOSE COLORS


Yellow



Red



ATTACK



USA MADE



Snap-Tite
HOSE™



HFX™ & HFX™ LDH

EXTRUDED NITRILE RUBBER ATTACK HOSE

- HFX™ is a nitrile thru-the-weave, rubber covered fire hose that utilizes polyester and nylon 6.6 yarn in the reinforcing jacket.
- Under pressure, the polyester keeps the hose from snaking, while the nylon allows for controlled dilation, reducing friction loss, and generating higher flow rates.
- Our special rubber compound provides a tough cover that resists heat, abrasion, snags, and hot embers.
- The interlocking matrix also means no adhesives are used and there is a permanent bond to all the warp and weft yarns.
- The Snap-tite HFX™ is highly resistant to both conductive and radiant heat.




HFX™ & HFX™ LDH

FEATURES

- Extruded thru-the-weave, nitrile rubber hose. The reinforcement is made with a blend of circular woven, twill weave, polyester, and nylon fibers.
- Ribs on the cover surface greatly increase abrasion resistance and help provide a long service life.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Suitable for attack, soft sleeve suction, and relay applications.
- Unique extruded nitrile rubber thru-the-weave construction provides a flexible, easy to maneuver hose that is easy to pack.
- Made in USA to ISO-9001:2015 certified quality assurance system.

TPX™ & TPX™ LDH

3-PLY EXTRUDED HOSE

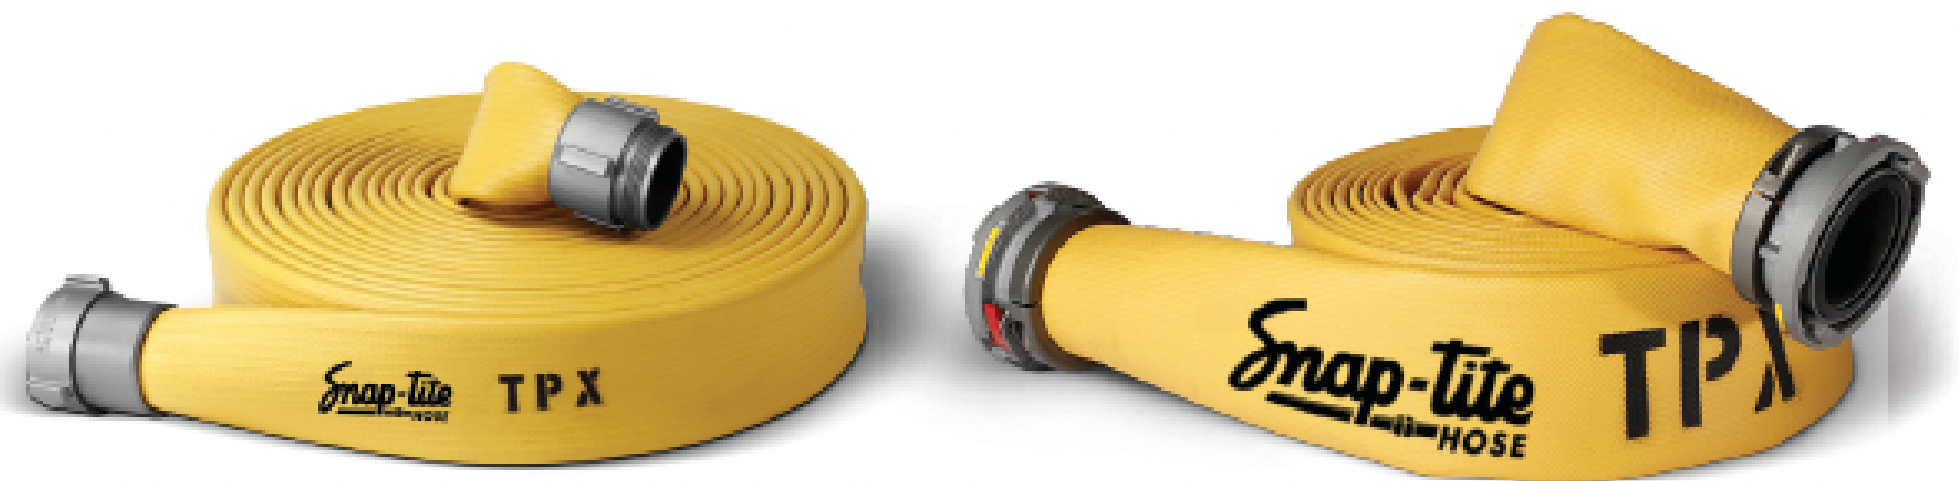

HOSE COLORS



ATTACK



USA MADE



Snap-Tite
HOSE™



TPX™ & TPX™ LDH

3-PLY EXTRUDED HOSE

- Traditionally, manufactured extruded hose can vary in thickness, becoming bulky and heavy. TPX™ utilizes a 3-ply design where the ribbed cover and smooth nitrile liner are extruded independently.
- The cover is inserted inside the tight-weave reinforcement, vulcanized, and turned inside out.
- The liner is then inserted and the hose is vulcanized for a second time to form a bond of all three plies, guaranteeing a consistent, compact hose wall.
- The Snap-tite TPX™ is highly resistant to both conductive and radiant heat.



TPX™ & TPX™ LDH


FEATURES

- 3-ply rubber hose with both the cover and liner made of heavy duty nitrile rubber, and high tensile strength woven polyester.
- Smooth liner keeps friction loss to a minimum. Nitrile rubber cover greatly increases abrasion resistance, provides long service life and the tightly woven reinforcement resists puncture.
- Suitable for attack and soft sleeve suction applications.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Lays flat and needs less hose bed space than typical extruded hose.
- Made in USA to ISO-9001:2015 certified quality assurance system



UTX™ LDH

LIGHTWEIGHT SUPPLY LINE

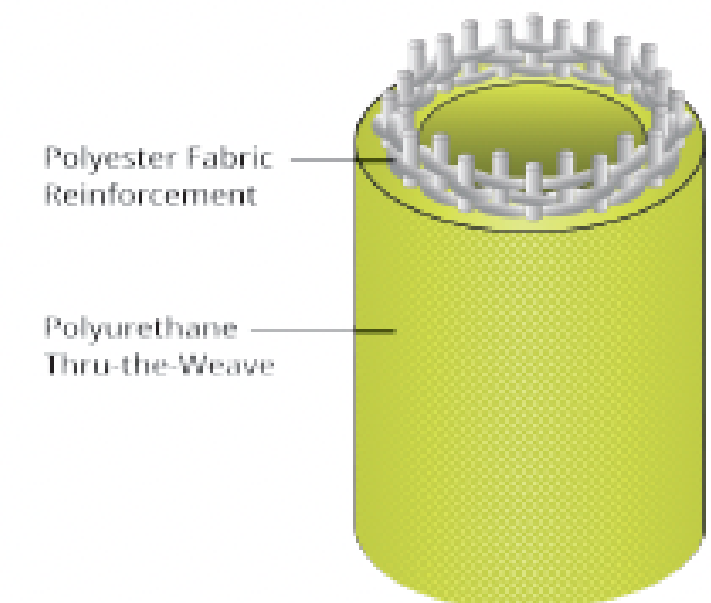

HOSE COLORS



USA MADE



Snap-Tite
HOSE™



UTX™ LDH

LIGHTWEIGHT SUPPLY LINE

- UTX™ is a tough lightweight extruded thru-the-weave hose.
- Its polyurethane material provides greater resistance to punctures and abrasion, while the thru-the-weave liner guarantees a lifetime warranty against delamination.
- UTX™ is compact and durable while providing higher resistance to oils, chemicals, and ozone.




UTX™ LDH

FEATURES

- UTX™ incorporates a circular woven polyester jacket that is completely encapsulated by an extruded thru-the-weave polyurethane cover and liner that provides abrasion and puncture resistance while remaining light and service worthy.
- UTX™ weighs 20% less than conventional rubber supply hose.
- Extruded thru-the-weave polyurethane construction and ultra-smooth liner minimize friction loss.
- Engineered to deliver more flow and more efficient packability.
- Remains flexible to -50°F (-46°C).
- Resists ozone, oxidation, and most chemical/petroleum products.
- Made in USA to ISO-9001:2015 certified quality management system.

ATX™

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

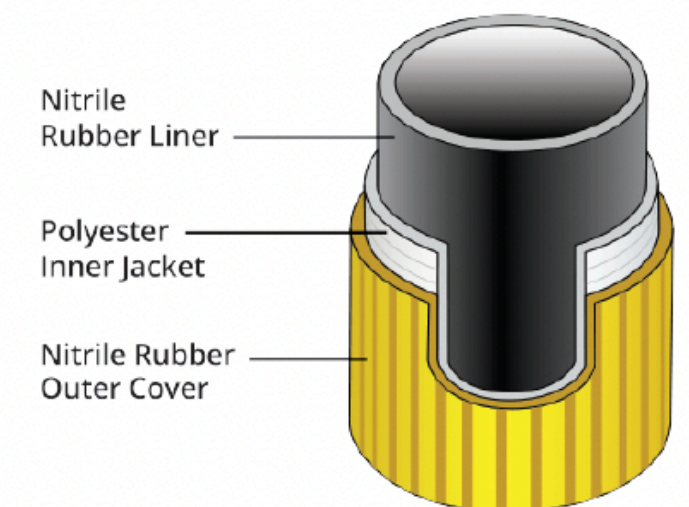

HOSE COLORS

Yellow

Red

Black



ATTACK



SUPPLY



USA MADE



Snap-Tite
HOSE™



ATX™

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

- Manufactured in a similar process as TPX™, ATX™ utilizes a 3-ply design where the cover and liner are extruded independently and double vulcanized to guarantee a consistent, compact hose wall.
- The polyester reinforcement can then be woven tighter, making this hose more resistant to puncture while also being easier to pack and store.
- ATX™ has a stronger jacket which increases the service test pressure of the LDH sizes to 300 psi.



ATX™


FEATURES

- 3-ply rubber hose with both the cover and liner made of heavy duty nitrile rubber.
- Smooth liner keeps friction loss to a minimum for greater flow.
- Nitrile rubber cover greatly increases abrasion resistance and the reinforced jacket resists punctures.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Engineered to meet the requirements of high pressure applications. Designed for relay pumping, pressurizing standpipes, and sprinkler systems.
- Made in USA to ISO-9001:2015 certified quality assurance system.



XLF™

DURABLE & RESISTANT TO PUNCTURE HOSE

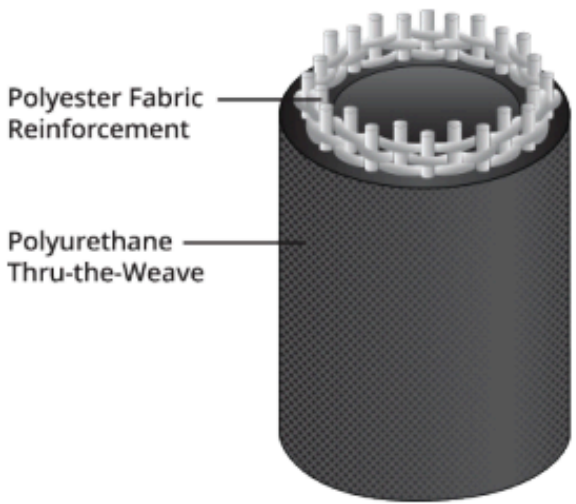

HOSE COLORS



A large oil pumpjack is silhouetted against a vibrant orange and yellow sunset sky. The pumpjack's long arm is extended upwards, and its counterweight is visible. The ground is dark, and some industrial structures are faintly visible in the background.

XLF™

DURABLE & RESISTANT TO PUNCTURE HOSE

- The XLF™ is a polyurethane thru-the-weave hose engineered for long-lasting durability and performance.
- Originally designed to replace metal pipes used in the fracking industry for transfer of large volumes of water, it makes a great main feeder line.
- The XLF™ is designed for extreme resistance to abrasion and punctures with little friction loss - all while being exceptionally lightweight.



XLF™

FEATURES

- Multi-purpose large diameter hose for oil/gas, water transfer, dewatering, refineries for tank fire suppression, nuclear, agriculture, military, and water/sewer bypasses during construction.
- The XLF™ inner jacket is designed with 100% high tenacity polyester yarn and extruded thru the-weave polyurethane - a unified, construction that ensures no delamination and provides abrasion protection.
- Hose can withstand exposure to most hydro-carbons, gasoline oils, alkalis, and grease.
- Hose shows no ozone exposure when subjected to testing in accordance with ASTM D1149-64, 100 PPHM /122 degrees F/70 hours.
- Made in USA to ISO-9001:2015 certified quality assurance system.

WHY CHOOSE SNAP-TITE?



As the only ISO 9001: 2015 certified lay-flat hose manufacturer in North America, Snap-tite Hose offers a solution tailored to the unique needs of firefighters, providing durable, high-performance hoses that ensure operational readiness, safety, and long-term reliability. The key features that make Snap-tite Hose an ideal choice include:

Durability: Built with advanced materials, Snap-tite hoses withstand extreme conditions, including high pressures, intense heat, and rough handling.

Reliability: Snap-tite Hose is trusted by departments across the country for its consistent, high-quality performance. Their hoses have a proven track record of reliability in critical situations.

Compliance with Standards: Snap-tite products meet or exceed industry standards, including UL requirements.

Complete solution: Snap-tite offers your complete solution for industrial operations.