




SUPREME™ II LDH

PREMIUM SUPPLY LINE.
OUTSTANDING VALUE.

Supreme™ II LDH is a premier double jacketed supply hose and one of the best values on the market today. Originally designed over 40 years ago, Supreme™ has become the hose to which all others are compared. With hose sizes up to 5" and manufactured to exacting standards, Supreme™ II LDH features a polyester outer jacket that encompasses an onyx nitrile rubber thru-the-weave liner.

FEATURES

- Premium quality outside jacket with an onyx nitrile rubber thru-the-weave liner construction. NO ADHESIVE IS USED. The lining will never delaminate.
- Optional Dura-Cote™ treatment.
- Remains flexible at temperatures as low as -40°F (-40°C) and is resistant to ozone and oxidation.
- Manufactured in accordance with NFPA 1960 Standard, the latest edition within our ISO-9001:2015 certified quality assurance system.

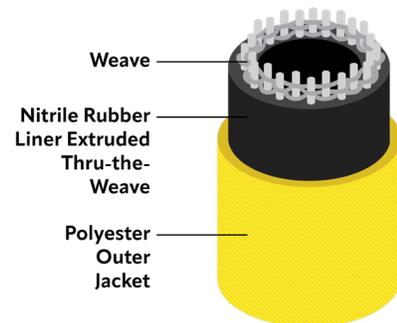


HOSE COLORS



SUPREME™ II LDH

PREMIUM SUPPLY LINE. OUTSTANDING VALUE.

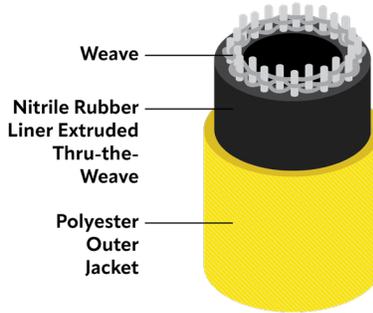

HOSE COLORS



TECHNICAL DATA & INFORMATION	
Model	Supreme™ II LDH
Basic Construction	Polyester outer/inner jacket, extruded thru-the-weave onyx nitrile liner.
Application	Supply
Colors:	Yellow, Red, Blue, Orange, Green, White (coated), White (uncoated)
Temperature Range	-40° F - 150° F

TESTING PRESSURES			
Nominal Size	Service	Proof	Burst
4"	300 psi	600 psi	900 psi
5"	300 psi	600 psi	900 psi

SUPREME™ II LDH

PREMIUM SUPPLY LINE. OUTSTANDING VALUE.

TECHNICAL DATA & INFORMATION											
NOMINAL SIZE	INTERNAL/OUTSIDE DIAMETER				WEIGHT						
	Dry ID	Charged ID at 50 psi	Charged ID at 150 psi	Charged OD at 150 psi	Water Pickup Weight*	Dry (lbs./50' coupled)	Charged at 50 psi (lbs./50' coupled)	# of Gallons/50'	Charged at 150 psi (lbs./50' coupled)	# of Gallons/50'	
4"	4.129"	Not applicable per NFPA					58	Not applicable per NFPA			
5"	5.105"	Not applicable per NFPA					69	Not applicable per NFPA			

TECHNICAL DATA & INFORMATION					
NOMINAL SIZE	DOORWAY KINK	ABRASION RESISTANCE		PACKABILITY	
		# of Taber Abrasion Cycles (H-22 wheel)	Flat Width (MM)	Edge Thickness (IN)	180° Bend Thickness (IN)
4"	Available Upon Request		184.98	0.850"	1.717"
5"	Available Upon Request		212.85	0.79"	1.587

*10-year warranty, 2-year all hazard warranty.

*MIL Std 24606 used for water pickup weight.

*Potable water approved: No

*Quality Management System Certification: ISO 9001:2015 Registration # 11-R1045